

Collusion Resistant DNS With Private Information Retrieval

Yunming Xiao¹, Peizhi Liu², Ruijie Yu², Chenkai Weng³, Matteo Varvello⁴, Aleksandar Kuzmanovic²

¹ The Chinese University of Hong Kong, Shenzhen ² Northwestern University

³ Arizona State University ⁴ Nokia Bell Labs

ABSTRACT

There has been a growing interest in Internet user privacy, demonstrated by the popularity of privacy-preserving products such as Telegram and Brave, and the widespread adoption of HTTPS. The Domain Name System (DNS) is a key component of Internet-based communication and its privacy has been neglected for years. Recently, DNS over HTTPS (DoH) has improved the situation by fixing the issue of in-path middleboxes. Further progress has been made with proxy-based solutions such as Oblivious DoH (ODOH), which separate a user’s identity from their DNS queries. However, these solutions rely on non-collusion assumptions between DNS resolvers and proxies – an assumption difficult to guarantee in practice. To address this, we explore integrating single-server Private Information Retrieval (PIR) into DNS to enable encrypted query processing without relying on trust assumptions. However, applying PIR to DNS is challenging due to its hierarchical nature – particularly, interactions with recursive resolvers can still leak information. Navigating performance and privacy trade-offs, we propose PDNS, a DNS extension leveraging single-server PIR to strengthen privacy guarantees. We have implemented a prototype of PDNS and compared its performance against state-of-the-art solutions via trace-driven experiments. The results show that PDNS achieves acceptable performance (2x faster than DoH over Tor with similar privacy guarantees) and strong privacy guarantees today, mainly at the cost of its scalability, which specialized hardware for PIR can address in the near future.

1 INTRODUCTION

The Domain Name System (DNS) is the phonebook of the Internet [18] which maps IP addresses like “151.101.195.5” to human-friendly names like “cnn.com”. At the birth of the Web, security and privacy were not contemplated, leaving DNS traffic as plain-text. This means that *any* middlebox placed between a DNS client and *recursive resolver* (ReR) could monitor user activity, potentially building accurate user profiles [64]. Twenty-eight years later, DNS-over-TLS (DoT) [75] and DNS-over-HTTPS (DoH) [71] solve this limitation by means of end-to-end encryption. DoT and DoH have been gradually supported both by clients (e.g., browsers like Chromium [25] and Firefox [22]) and ReRs [21, 23].

End-to-end encryption protects a user’s privacy from eavesdroppers but not from a ReR. ODNs [111] is a recent solution – a variant of which, ODOH [116], has already deployed by Cloudflare – to address such problem by detaching a user identity from a DNS request. This is achieved by adding a proxy between DNS client and ReR such that: (i) the proxy is blind with respect to an encrypted DNS query, (ii) the ReR is blind with respect to the client’s identity (IP address). Assuming a non-colluding proxy and ReR (i.e., the proxy and resolver do not cooperate to share information), user privacy is enforced. However, non-collusion is hard to enforce and verify in reality. For example, both proxy and ReR can be subjects

of a subpoena, at which point privacy is again sacrificed. Or, in the case of proxies and ReRs located in different countries, there may be insufficient legal bounds to prevent collusion. Adopting a complex proxy setup, such as using the Tor network, can address the non-collusion issue, but it comes with a significant performance trade-off.

An alternative approach to protect users from the above privacy infringement would be either removing the ReRs from DNS [112], or having ReRs operating *in the blind*, i.e., by resolving domains without knowing what they are. The former option exhibits high performance penalties to users, amplifies workloads on the authoritative name servers (ANsEs), and raises additional security concerns. The latter option seems counter-intuitive, but in reality, several techniques exist which allow similar operations. These techniques fall in the branch of Private Information Retrieval (PIR), which is achieved by various cryptographic tools such as homomorphic encryption [37, 58, 62, 104]. Indeed, private DNS is often cited as a motivating example in PIR research, but no practical implementation currently exists.

The goal of this work is to explore the feasibility of integrating PIR into DNS and fill the gap between PIR and DNS research. We do so by introducing PDNS, a Privacy-Preserving DNS designed to *augment* rather than replace DNS, in a spirit similar to DoH and ODOH. To achieve our vision, we had to solve the following challenges.

Cache population: PIR protocols assume that a database (or cache in DNS context) is either given or can be privately populated. This is not the case for DNS where the ReR is responsible for populating its cache based on the user request. Clearly, a *blind* ReR cannot perform such operation which should be tackled by the client instead. Meanwhile, the client cannot update the ReR cache either, or it would invalidate the system privacy. To address this issue, we propose EDNS-PR, a custom EDNS(0) [50] extension which allows a client to communicate the IP address of its ReR in presence of cache misses, so that an ANS can privately populate the ReR’s cache.

Concerns may arise regarding the privacy exposure for clients performing iterative DNS lookups. Indeed, PDNS is not yet the final sanctuary. Essentially, PDNS trades the privacy exposure at the ReR, or the ReR and the proxy combined in the case of ODOH, for *partial* privacy exposure at the ANsEs. We argue that this trade-off raises the level of privacy preservation because, with the current DNS system, the ReR alone or in collusion with proxies can collect all the information of every individual user. Distributing information exposure to millions of ANsEs significantly increases the difficulty of gathering information about an individual user or group. The impact of privacy exposure to ANsEs is further reduced by the fact that ANsEs are likely already gaining information about users from users’ subsequent traffic [73], such as HTTP(S) requests for webpages directed to domains within their region. Thus queries to ANsEs add no *additional* information than they already know.

Moreover, the caching by PDNS ReRs and our shortcut mechanism (see § 4.2) ensure that only a small portion of user activities reach the ANSes. Therefore, we consider PDNS an overall privacy enhancement compared to existing solutions, providing resistance to *realistic* collusion between two or several parties, e.g., proxies and ReRs, but not among millions of ANSes.

Security challenges: The previous construction imposes new security challenges for DNS. Attackers can either congest ANSes, or launch *reflection* attacks to congest or poison the cache of ReRs. We leverage the security properties of Spiral with digital signatures to allow ANSes to *validate* cache misses when needed, *i.e.*, when suspecting a potential attack.

PIR selection and optimization: Out of all the available PIR categories, we suggest utilizing the single-server stateless PIR schemes for DNS, as they do not require a non-collusion agreement, bear low costs for cache updates, and offer satisfactory running times for query processing. We benchmark multiple schemes and find that Spiral [91] offers the fastest running time, the shortest query size, and high-quality open-source implementation. To integrate Spiral into DNS, we researched the optimal DNS cache configuration for PIR, and implemented performance enhancements leveraging multi-threading and low-level instruction support.

We implement a proof-of-concept of PDNS, including a client and ReR, and extend the popular BIND9 [19] to support EDNS-PR as our own extension of EDNS(0) at the ANS. In our experiments, PDNS answer queries 2x faster than DoH over Tor – a privacy-preserving anonymous network – even on a *large* cache (512MB, up to 13M DNS records). PDNS is also faster than ODoH (208ms versus 272ms) with a *small* cache (64MB, up to 1.6M DNS records), and adds 180ms with a large cache. We envision that the advent of specialized hardware for PIR would reduce PDNS’ query duration to 70ms (even on much larger caches), thus making its performance comparable with DoH.

Such competitive performance and strong privacy guarantees do not come for free. PDNS requires extra computational resources at a ReR to handle queries fast. Our benchmarking on an 8-core 3.0GHz AMD EPYC shows that a PDNS ReR can only handle few queries per second, while DoH can handle hundreds of queries per second. This implies a higher deployment cost for an operator, which can be absorbed via a subscription model for privacy-oriented customers, as currently done by VPN providers. Indeed, Our analysis shows that a monthly subscription fee of \$5 per user is sufficient to make PDNS financially viable today without accelerators (see Appendix F), a reasonable cost given that people may pay more for privacy-preserving network services such as VPN. This cost is likely to be significantly reduced along with substantial performance improvements in PDNS with near-future hardware accelerators [90, 109], making PDNS competitive with DoH. Further, participating ANSes need to support DoH, which causes a significant bandwidth increase. Nevertheless, such DoH adoption is not only meant for PDNS but also beneficial to current DNS, as it amends an existing user privacy violation [66, 101]. DoH for ANSes has been proposed independently from PDNS [72].

One final question remains: *what are the incentives for the adoption of PDNS?* For users, the extra privacy provided justifies the minor performance penalty. For the ReR, the extra cost is justified

by unprecedented privacy guarantees, which could be offered at a premium. Participating ANSes also have an incentive to support PDNS, as the additional traffic is offset by the increased privacy they can provide to their supporting web domains (which are either their customers or directly operated by them), a valuable asset for competing domains especially when offering sensitive content. Notably, PDNS can be adopted incrementally, as detailed in § 4.4.

2 BACKGROUND AND MOTIVATION

2.1 DNS and Privacy

DNS clients send queries to a ReR, either run by an ISP or by public providers such as Google [24] and Cloudflare [21]. The ReR uses a cache to speed up DNS queries; cache misses trigger *iterative* DNS lookups to the ANSes for the root, top-level domain, and final zones (“root/TLD/final ANS” for short), before returning an answer to the user while updating the ReR’s cache. The DNS RFC [20] specifies to send DNS queries either via UDP (DoUDP) or TCP (DoTCP). UDP was adopted in most cases because of better performance given due to its absence of connection handshake [80].

The original DNS protocol does not use encryption, potentially exposing user privacy to in-network eavesdroppers. Recent IETF standards DoT [75] and DoH [71] require the client to establish an encrypted session with the ReR. While DoT/DoH protects user privacy from in-network eavesdroppers, the ReRs still have full visibility of the DNS queries from their users. This represents a considerable privacy breach, especially in presence of public ReR with massive user bases like Google and Cloudflare. Distributing the DNS queries to multiple resolvers helps to protect the user privacy to a certain extent [70, 73, 74, 82]; yet the best solution can only achieve k-anonymity, which is still vulnerable to various attacks [88].

Oblivious-DoH (ODOH) [78, 116] introduces an *oblivious* proxy between user and ReR. Assuming the ReR does not collude with the oblivious proxy, user identity and DNS queries are disjoint. However, non-collusion is hard to enforce and verify. To mitigate the non-collusion problem (we restrict our discussion of collusion in realistic scenarios, see § 2.3), it requires carefully distributing queries across multiple proxies or using a long chain of proxies [83, 94, 95, 107]. For instance, DoH over Tor (DoHoT) relays the encrypted DNS queries over Tor [94, 95], taking advantage of onion routing which builds up a chain of proxies and hence significantly increases the difficulty of collusion [43].¹ However, DoHoT incurs significant delays, e.g., 4x slower than DoH [116] and 2x slower than PDNS (§ 7.1), and is error-prone given its reliance on volunteers [15, 100]. It further faces additional usability issues. For instance, it is banned in certain regions due to censorship and/or association with dark net activities. As a result, users in those regions are unable to use such DNS privacy solutions. μ ODNS [83] adopts a similar multi-hop setting and assumes a dedicated and trusted proxy exists in the proxy chain. Nevertheless, this setup is costly and too complicated for ordinary Internet users.

In [112], the authors have recently proposed the provocative idea of eliminating all ReRs, thereby addressing DNS privacy issues

¹Note that DoUDP/DoTCP over Tor is less secure than DoHoT, as they are vulnerable to DNS pollution by a single entity – the Tor network’s exit node – which could return malicious DNS responses, such as phishing sites.

– including the non-collusion problem since it does not apply anymore – associated with them. This approach has several concerning shortcomings. First and foremost, it introduces DNS “flattening”; DNS is hierarchical to provide *speed*, as a closeby resolver would respond if it can, *scalability*, as distributed caching avoids redundant queries, and *reliability*, as distributed caching allows to cope with failures at ANSes. As discussed in [112], such flattening would increase the overall DNS load by a few times, potentially becoming unsustainable for ANSes of popular or root zones [60]. Second, this approach is currently impractical as many ANSes, e.g., Akamai [113], adopt complex rate limiting solutions to prevent traffic from non ReRs. Finally, ANSes currently do not support HTTPS (see § 4.3) thus requiring [112] to rely on DoUDP. This implies that pervasive traffic monitoring is possible under such approach, which indeed deteriorates the overall DNS privacy. A more robust solution should involve implementing DoH across all ANSes (“ReR-Less DoH”), which would further increase the overall DNS load and still raise new security issues at ANSes.

2.2 Private Information Retrieval

PIR protocols [31, 45, 47, 48, 76, 79, 87] are advanced cryptographic techniques which allow a client to fetch an item from a remote database, e.g., the ReR cache in the DNS scenario, without letting the server know which item it is. At a high level, PIR protocols are divided into *single-server* and *multi-server*, referring to how many server-side components they rely on. Overall, multi-server PIR provides efficient data transmission between the user and the servers, and lightweight computation, but it requires at least two non-colluding servers [48, 76, 79, 87]. It also requires intensive synchronization between servers for the maintenance of identical databases. *Single-server* PIR protocols only require one untrusted server but rely on heavier cryptographic operations [31, 68, 91], which make them slower than multi-server PIR. Despite the latter, we argue that a robust privacy-preserving DNS should not rely on a non-collusion agreement, and thus discard multi-server PIR solutions.

PIR protocols can also be *stateful* or *stateless*. Stateful protocols [48, 68, 79] require the user to maintain a state, which contains information to generate PIR queries. The state is fetched from the PIR server and expires whenever the database is updated. With stateless protocols [31, 76, 91], the user does not store and update any database-related state except for the query keys. Given that a DNS cache changes frequently, stateless PIR should be preferred. Appendix B offers more details on single-server stateless PIR.

2.3 Goals and Challenges

Goals – Table 1 summarizes the privacy-preserving properties of state-of-the-art DNS solutions. Among the existing options, only DoHoT and the hypothetical ReR-Less DoH offer comprehensive privacy protections, including collusion resistance, which is the primary focus of this paper. However, it is noteworthy that DoHoT suffers from performance inefficiencies and may be vulnerable to usability constraints (e.g., in certain countries/regions), while ReR-Less DoH compromises DNS security and reliability. Single-server PIR has the potential to deliver a new solution with the same comprehensive privacy protections to DNS users while outperforming

Table 1: Privacy properties of various DNS solutions.

Solution \ Property	Defend Pervasive Monitoring	Protect Individual Profile	Survive Non-Collusion Violation
DoUDP [20] / DoTCP [55]	No	No	N/A
DoT [75] / DoH [71]	Yes	No	N/A
DoT/DoH + Resolver Rotation [74, 107]	Yes	Yes	N/A
ODNS [111] / ODoH [116]	Yes	Yes	No
DoHoT [94, 95] / μ ODNS [83]	Yes	Yes	Yes
ReR-Less + DoUDP [112]	No	No	N/A
ReR-Less + DoH/DoT	Yes	Yes	N/A
DNS + Multi-Server PIR	Yes	Yes	No
DNS + Single-Server PIR	Yes	Yes	Yes

DoHoT in performance and usability, and ReR-Less DoH in compatibility and practicality, but it comes with several extra challenges we discuss below.

Challenge 1: cache population – PIR guarantees that the ReR cannot identify the queried domains. This also implies that PIR prevents a ReR from populating its cache, which invalidates its function. A strawman solution consists of bypassing PIR in presence of cache misses, e.g., resorting to regular or ODoH as discussed in Appendix C. However, these solutions put user privacy at risk. We propose a slight DNS modification wherein clients directly resolve DNS cache misses, and final ANSes populate a ReR’s cache (§ 4.2).

Challenge 2: compatibility with existing DNS – Our goal is to enhance DNS with comprehensive privacy, rather than a complete overhaul. Specifically, we envision a design change similar to DoH, with minimal modifications required for clients and servers (ReR and ANS). While this constrains the design space, it also reduces the barriers to adoption.

Challenge 3: performance – The recent DNS evolution in the interest of user privacy has caused a slowdown in DNS queries. For instance, DoH requires at least three times the query time of DoUDP because of the handshakes to establish an encrypted channel. The handshake can be avoided if the HTTPS connection is re-used. However, this does not apply to DoH with proxy rotation which provides better privacy guarantees (see Table 1). In our measurements (see § 7.1), the median query duration for DoH is 69 ms, versus 25 ms for DoUDP, and it grows to about 272 ms for ODoH. Some previous studies [36, 116] report similar results while others [41, 44] report much higher values depending on the user location and distance to the ReR.

The introduction of PIR in DNS brings further slowdowns due to its additional complexity. On the one hand, this is expected and understood by users as a trade-off for additional privacy, as commonly experienced in privacy tools like Tor or VPNs. On the other hand, a key challenge is to conceive a design that minimizes such overhead and achieves query times competitive with the state of the art. To address this challenge, we carefully select the PIR scheme, and modify its implementation where performance bottlenecks are detected. Further, we explore optimizations in DNS record storage and transmission.

Non-goals and limitations – Our aim is to enhance DNS privacy in a practical manner, rather than eliminating all privacy leaks,

as doing so may require a complete overhaul of DNS. It is also unattainable to claim full privacy given the ever-evolving nature of privacy demands and definitions. Importantly, this paper focuses exclusively on DNS privacy and does not address vulnerabilities associated with other Internet activities *before* or *after* the DNS queries, such as search engines, Web browsing, etc [28, 51, 65, 67, 100, 121, 123].

Moreover, our proposal focuses on exploring the potential of integrating DNS and PIR to enhance DNS privacy, particularly in terms of resisting collusion. Note that, PDNS does not introduce a new or complete solution to the longstanding issue of DNS end-to-end authentication, *i.e.*, enabling users to verify the validity of a retrieved DNS record on their own. Instead, PDNS relies on existing protocols: it is compatible with DNSSEC [32] and more recent proposals like RHINE [57]. Nonetheless, PDNS aims to minimize violations of end-to-end authentications to the greatest extent within our capability. These violations at the ReR can occur in two ways: modifying or dropping a cached DNS record. In the first scenario, the ReR may substitute a domain’s IP address with a self-controlled one to conduct phishing attacks. However, such a fake IP can be identified by the users when they make subsequent actions, *e.g.*, sending web requests to the IP address. Assuming a covert adversary model [33] for the ReR, this type of detectable misbehavior would damage the ReR’s reputation or result in legal consequences. In the second scenario, the ReR might deliberately drop cached DNS records to force users to query final ANSes, thereby repopulating the ReR’s cache, which could expose user activity. While this is more difficult to detect on the user’s side, we propose solutions to mitigate this issue (see § 4.3, “Delayed Response Forwarding” in § 4.2, and § 5).

In addition, regarding the collusion resistance, we restrict our discussion to realistic scenarios involving a limited number of parties, such as a few ReRs and proxies, but not impractical scenarios, *e.g.*, involving millions of colluding ANSes. Finally, PDNS’s guarantee relies on having a *sufficient* number of active users using the system, *e.g.*, at least a few at a time. If only one user is active and experiences a cache miss, it becomes possible to determine the content of that user’s query through a timing attack (see § 4.2). It is important to note that DoHoT also has similar requirements; that is, a certain number of honest nodes is necessary to ensure privacy.

3 PDNS OVERVIEW

Figure 1 visualizes the workflow of PDNS both at a high level (on the left) and reporting its key PIR “primitives” (on the right). In the remainder of this section, we define our privacy and threat models. Next, we define some fundamental PIR primitives which we use to formulate PDNS’s workflow.

3.1 Privacy and Threat Models

Privacy model – DNS involves three main actors that can violate user privacy: ReRs, ANSes, and any in-network device capable of intercepting DNS traffic. We assume ReRs act as *covert adversaries* [33] who may deviate from the protocol arbitrarily as long as their malicious actions remain undetected. For instance, they might track and inspect DNS queries or deliberately/selectively drop DNS records from their cache in an attempt to infer which user might

query a domain when the record is re-cached. However, actions like modifying the IP addresses of cached domains can be detected, *e.g.*, when users send subsequent requests to those addresses. The exposure of such misbehaviors can damage the ReRs’ reputation, discouraging users from utilizing their services, and may also lead to financial or legal penalties for the ReRs. We also assume that DNS traffic can be intercepted by third parties, *i.e.*, middleboxes interposing between DNS clients and both ReRs and ANSes. However, we assume that the attackers cannot break cryptographic primitives and are not ubiquitous in the WAN.

With respect to ANSes, their role requires some further discussion. ANSes operate at different levels in DNS, *e.g.*, from *non-final* ANSes which are responsible for large domains like *.com*, to *final* ANSes which are responsible for one or just a few domains. Queries to non-final ANSes are less sensitive as they reveal only partial information – under the assumption that DNS query minimization [35, 53, 89] is used, *e.g.*, avoid forwarding the full domain at each step.

The privacy leak of a query increases as we approach the final ANS, since the full domain name is required in each query. However, it has to be noted that such ANSes are either operated by the same organization as the target domain, or by an organization contracted by the domain provider, *e.g.*, when leveraging Amazon Route53 [2]. It follows that such DNS queries do not leak any extra private information about a user than what the subsequent traffic directed to the domain [73], *e.g.*, HTTP(S) in case of a webpage. Finally, ANSes are not in the position to gain access to a full individual user profile. In conclusion, we assume that ANSes cannot be *fully* trusted but they are not a critical DNS actor with respect to user privacy, differently from ReRs.

Threat model – Many threats exist for DNS today, *e.g.*, amplification, snooping, and DoS attacks [30, 34, 103, 113]. Overall, existing solutions to counter such attacks are still viable in PDNS. However, PDNS departs from the regular DNS workflow requiring its users to directly perform iterative DNS lookups (steps ④ – ⑦ in Figure 1) in presence of cache misses. While this is not a threat per se, it invalidates a common practice adopted by large ANS providers which limit requests from non-well-known ReRs to protect against potential DoS attacks [113]. Such rate limitation works in the current DNS where users are supposed to perform their queries recursively (see § 2.1), but would fail in PDNS when handling cache misses. Note that this applies even more to solutions like ReR-Less [112], which fully bypass ReRs.

Finally, ANSes in PDNS are tasked to populate a ReR’s cache, and could be misused to DoS a ReR via “reflection”. This attack can be performed both by a malicious ANS or by an attacker disguising as an ANS. § 5 presents a defense mechanism to handle both reflection and DoS attacks. This mechanism relies on validating PDNS cache misses, and can thus not be applied to solutions like ReR-Less [112].

3.2 PIR Primitives

PIR schemes assume a key-value database $C = (c_1, \dots, c_N)$ of size N where the i -th key-value pair is defined as (i, c_i) . All entries c_i are of the same length. Later we will explain how our construction allows for variable-length DNS records. We here define several PIR *primitives* which are the founding blocks of most single-server

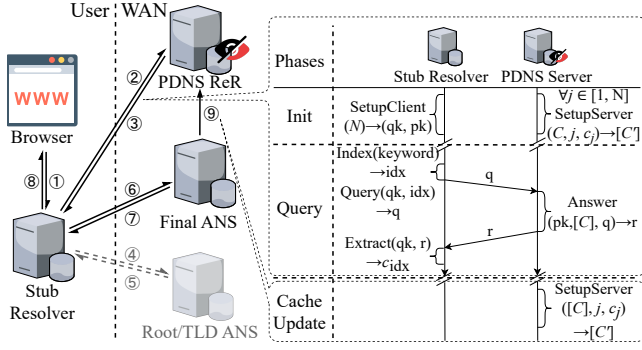


Figure 1: Visualization of PDNS and its workflow.

stateless PIR schemes. Assuming that the database size N is known to both user and server. $[C]$ is denoted as an encoding of C and is initially filled with zeros. The way a server encodes the database is specific to the PIR scheme. Define the following primitives for the user setup and database construction.

- $\text{SetupUser}(N) \rightarrow (qk, pk)$: Given as input the database size, the user executes the *SetupUser* primitive which outputs a query key qk and a public key pk . The user stores qk as a private key and sends pk to the server. This step is only needed the first time a user connects to a server, or when the user generates a new pair of keys. § 9 discusses how to share pk in a real-world deployment consisting of multiple clusters of ReRs.
- $\text{SetupServer}([C], j, c) \rightarrow ([C'])$: Given as input the encoded database, an index $1 \leq j \leq N$ and an entry c , the server executes the *SetupServer* primitive which replaces the j -th entry in $[C]$ with c and outputs it as $[C']$. The server executes this alone when updating the database.

After setting up the users and constructing the database, the following primitives are used for PIR queries.

- $\text{Index}(\text{keyword}) \rightarrow \text{idx}$: Given as input a keyword of the target record, *i.e.*, the domain name in the DNS scenario, the user or server executes the *Index* primitive, which hashes the keyword to an index $\text{idx} \in [1, N]$.
- $\text{Query}(qk, \text{idx}) \rightarrow [q]$: Given as input a query key and an index, the user executes the *Query* primitive which outputs a query $[q]$. It is a ciphertext that encrypts idx .
- $\text{Answer}(pk, [C], [q]) \rightarrow [r]$: Given as input the public key of the user, the encoded database, and a query, the server executes the *Answer* primitive, which outputs a response $[r]$. It is a ciphertext that encrypts c_{idx} .
- $\text{Extract}(qk, [r]) \rightarrow c_{\text{idx}}$: Given as input the query key and response, the user executes the *Extract* primitive which decrypts the ciphertext r and outputs c_{idx} .

3.3 Workflow

PDNS workflow consists of three main parts: initialization, query, and cache update (see Figure 1). Define N as the maximum number of PIR cache entries and X as the number of DNS records. The PIR cache entries are of the same length and each of them may be filled with multiple DNS records.

Initialization – Given as input X_0 initial DNS records, the PDNS ReR constructs a PIR DNS cache $C := (c_1, \dots, c_N)$ and executes

the *SetupServer* primitive to obtain an encoded cache $[C]$. Upon registering to a PDNS ReR, the user executes $\text{SetupUser}(N) \rightarrow (qk, pk)$ to derive the query key qk and public key pk . The user sends pk to the ReR, which needs it to answer private DNS queries. This is a per-user key that can be shared across multiple ReRs, *e.g.*, in the case of a cloud DNS with multiple machines for load balancing (see § 9).

Query – A DNS query in PDNS implies the following steps:

- (1) A user who wants to visit a domain d executes $\text{Index}(d) \rightarrow \text{idx}$. idx is a hash result of the domain d and it points to a specific slot in ReR’s cache, where the DNS record for d might be located. User executes $\text{Query}(qk, \text{idx}) \rightarrow [q]$ and sends the encrypted query $[q]$ to the PDNS ReR (②).
- (2) The PDNS ReR executes $\text{Answer}(pk, [C], [q]) \rightarrow [r]$. The output $[r]$ is a ciphertext that encrypts the corresponding cache slot, and is kept secret from ReR. The ReR sends $[r]$ to user (③).
- (3) User executes $\text{Extract}(qk, [r]) \rightarrow c_{\text{idx}}$. If c_{idx} contains a valid DNS record for the domain d , the DNS query is terminated. Otherwise, the user performs an iterative DNS lookup (④ – ⑦). Note that PDNS attempts to speed up such iterative DNS lookup by providing in c_{idx} the NS-record of d , or the IP address of the ANS for d (thereby skipping ④ and ⑤, see § 4.2). The ANS could optionally invoke an authenticity request which asks the user to prove the existence of cache miss (see § 5).

Cache update – The cache update happens after a cache miss is triggered and the user finishes an iterative DNS lookup for a domain d . The final ANS for d populates the PDNS ReR’s cache by sending its most recent DNS record for d (⑨). PDNS ReR constructs a new entry c_j that contains the new record, and executes $\text{SetupServer}([C], j, c_j) \rightarrow ([C'])$ to obtain a new encoded cache. As long as the final ANS does not “collude” with the ReR, the user’s privacy is maintained. This is not a violation of our privacy model as final ANSes have access to the user queries anyway (§ 3.1); instead, rather than being a case of collusion, it is merely a unidirectional information transfer from the final ANS to the ReR.

4 PDNS DEEP DIVE

4.1 DNS Cache Construction

PIR schemes assume a key-value cache $C = (c_1, \dots, c_N)$, *i.e.*, a hash table where a standard hash function H – known by both server and users – realizes $\text{Index}(\cdot)$ (see § 3.2). A hash table is similar to the data structure used by current ReRs for their cache, *e.g.*, the popular BIND9 [3]. Yet, one critical difference is that, with PIR, the capacity of the hash table is determined beforehand and all slots – no matter if occupied by DNS records or placeholders – have to be encoded into $[C]$ via the *SetupServer* primitive (see § 3.2). At run time, DNS records are inserted by re-encoding the content at a slot indicated by the hash function.

Generally speaking, the query time of PIR increases as the capacity of the hash table increases (see Appendix B). There is thus an incentive to reduce its size which in turn leads to more hash collisions, *i.e.*, multiple entries hashing to the same slot. PIR schemes often use Cuckoo hashing – where colliding entries are hashed with a second function – to minimize the hash collision rate [29, 97].

The drawback of Cuckoo hashing is that the users need to send multiple queries, one per hash function used, which increases the query time by at least $2x$.

Recent PIR schemes such as Spiral [91] offer faster query time in presence of larger cache slots, e.g., § 6.2 shows the optimal performance when considering 16KB slots where roughly 264 (IPv6) to 431 (IPv4) PDNS records per slot (see Figure 2) could be stored. Accordingly, instead of reducing hash collisions via Cuckoo hashing, we leverage hash collisions to purposely build large cache slots, which reduces the query time at the expense of more data to be returned to the user since the entire slot is returned (even if only containing placeholder data and no actual DNS records). To do so, we adopt a slight modification of *chaining* [93] (see Figure 2), where colliding entries in a slot are stored in a priority queue instead of the classic linked list. We order each priority queue using DNS record expiration times such that, once the queue overflows, the record that is most likely to expire is evicted.

4.2 Handling Cache Misses

In presence of cache misses, the user performs the iterative DNS lookup – although minimizing traffic to non-final ANSes as discussed next. After answering the DNS query from the user, the final ANS forwards the response to the PDNS ReR (whose IP was provided by the user) to populate its cache without leaking the IP address of the requesting user. This traffic is randomly delayed to avoid the ReR correlating a previous query with a record update. Note that the final ANS might return a different response to the ReR occasionally when client and ReR are geographically distant.

Minimizing iterative traffic – To shortcut the iterative lookup, and mitigate the privacy leak to root and TLD ANSes, we merge NS and A/AAAA records by appending the IP address of the final ANS at the end of the A/AAAA record (see Figure 2). The main drawback of this approach is that it consumes precious cache space (e.g., 4 extra bytes per IPv4 address of the ANS added) which negatively affects the query time (see § 6.2). To regain some cache space, we replace the domain name field (variable length of maximum 256 bytes) with a hash value of the domain name – a fixed length of 16 bytes digest. In addition, embedding the ANS’s IP address in the DNS record may introduce reliability concerns if ANSes occasionally change their IP addresses. However, such events are extremely rare, and the impact is acceptable, only requiring clients to repeat the iterative lookup.

For simplicity, we only consider A/AAAA/NS DNS records in this paper. Note that PDNS is compatible with other types of DNS records since they are essentially strings with different lengths of up to 512B, which can be easily fit in large slots (tens of KBs, see § 6.2) of PDNS cache.

It is noteworthy that the above shortcut only applies to expired cached domains and will not work with uncached domains, which instead require full iterative DNS lookup at the client. We adopt this approach in PDNS because DNS record expiration is the main cause of the cache miss [40].

To identify cache misses at the client, another modification of the DNS record is required. Currently, an A/AAAA record contains: domain name, type, class, time-to-live (TTL), rdlength, and rdata [20]. The TTL field indicates for how long the received DNS record is

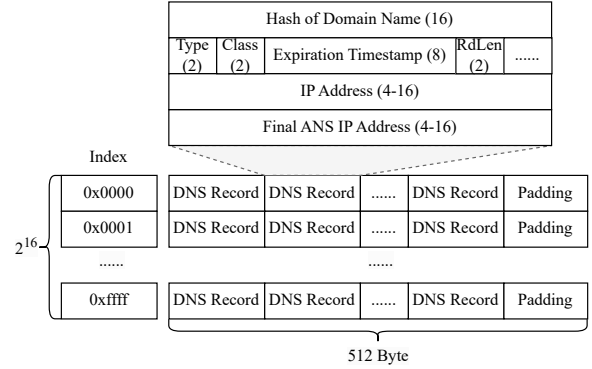


Figure 2: PDNS cache as a hash table with 2^{16} slots.

valid. DNS records stored at the ReR also contain a timestamp of when the record was resolved. Each time a DNS query is matched in the cache, the ReR checks whether this record is expired. To allow the client to perform this operation, we replace the TTL field with a timestamp indicating when the record expires, i.e., timestamp at insertion plus TTL, as illustrated in Figure 2.

The client communicates the IP address of its PDNS ReR to the ANS using a solution à la EDNS-PR, our own extension of EDNS(0) [50] similar to EDNS Client Subnet (ECS) [46] but with a different EDNS(0) OPTION-CODE. ECS is a DNS extension that allows a ReR to share the subnet of a client’s IP address to an ANS for improved geolocation, enabling the ReR to resolve a domain to the closest available IP to the client. In PDNS, EDNS-PR includes the IP address of the ReR so that the ANS knows where to send the copied response to populate the ReR’s cache.²

Delayed response forwarding – PDNS ReR may perform a timing attack to correlate the user who finished the DNS query right before it receives the populated cache entry from the authoritative server. To mitigate this attack, the cache population traffic from the authoritative server to PDNS ReR should be randomly delayed. For example, assume two users *A* and *B* send a query at time t and $t + \Delta$ ($\Delta > 0$), respectively. Define a random variable X as the delay of the response forwarding to ReR determined by an authoritative server. We let the authoritative server sample the delay from a distribution \mathcal{D} , i.e., $X \leftarrow \mathcal{D}$. If $\text{Prob}(X > \Delta) > 0$, meaning that the response for *A*’s query might arrive after *B* finishes its query, then it might pose difficulty for the PDNS ReR to decide which query should this response correlate to. A simple solution is to use a uniform distribution from 0 to 2Δ , i.e., $\mathcal{D} = U(0, 2\Delta)$. It follows that the probabilities of response occurrences for both user queries at $\Delta + s$ where $0 < s < \Delta$ are identical, i.e., $\text{Prob}(X = \Delta + s) = \text{Prob}(X = s)$. This translates to a 50% chance for PDNS ReR to fail to execute a timing attack. Appendix G shows – via a formal investigation – that by sampling the random wait time from appropriate distributions, PDNS can effectively defend timing attack.

²Note that we use the full IP address for the PDNS ReR in EDNS-PR, instead of the subnet as suggested in ECS RFC [46]. The ECS RFC suggested using a subnet to protect the privacy of the user’s IP address being communicated (and unfortunately mostly in plaintext with DoUDP today [20]), whereas in our proposal we send the IP address of the PDNS ReR (using encryption, see next section), which is not violating user’s privacy.

4.3 Communication Encryption

DoT or DoH are rarely supported by ANSes, e.g., we tested 100 popular ANSes for different zones and found no support. Given that PDNS relies on iterative DNS lookups performed by its clients to handle cache misses (see § 4.2), the lack of encryption on this communication channel fails to protect against in-network eavesdroppers, thus violating our privacy model (see § 3.1). Therefore, ANSes participating in PDNS need to adopt DoT/DoH to satisfy our privacy requirements.

On the path between user and PDNS ReR, PIR offers chosen-plaintext attack (CPA) security [77], meaning that, although the query content is kept secret from an attacker, *integrity* and *authentication* are not provided. It follows that an attacker can disrupt the service or even impersonate the ReR and attempt other attacks like phishing. Therefore, PDNS adopts HTTPS between client and ReR to guarantee integrity and authentication. We favor HTTPS over TLS since it makes it hard for third parties to distinguish between DNS and HTTP traffic given they both use port 443 [49]. It is also important to note that in proxy-based mechanisms (like ODoH), HTTPS connection reuse requires no correlation between client-proxy and proxy-ReR connections in order not to affect user privacy [116]. This constraint does not apply to PDNS as PDNS ReR is blind to DNS query contents.

Finally, when the final ANS populates the cache of ReR, it should ideally use DoH to prevent malicious attackers from impersonating its identity through techniques like IP spoofing. This also helps avoid the false accusations of misbehavior of ReR, e.g., selectively dropping DNS records for target users (§ 5), which could otherwise occur due to the unreliability of UDP transmission.

4.4 Gradual deployment

Similar to DoH, universal adoption of PDNS is not a requirement. We envision three scenarios:

- Ad hoc networks: operators in specialized environments such as military networks have full control over the entire network. This allows for end-to-end PDNS implementation, covering clients, ReRs, and ANSes.
- ReR-based approach: clients install a local proxy which intercepts DNS queries and converts them into PDNS queries for a predefined subset of domains. ReR proactively maintains a curated list of domains to be resolved privately, ensuring enhanced privacy for specific use cases. While PDNS can be bootstrapped without ANS support, it faces two challenges: (i) it contradicts DNS caching principles, and (ii) limited domain sets reduce privacy guarantees.
- Organic adoption: some ANSes begin supporting PDNS to attract privacy-conscious users and gain a competitive edge over other domains offering similar services. Over time, this could drive widespread adoption of PDNS, following a trajectory similar to the adoption of HTTPS and DoH. Meanwhile, cloud ANS providers like Route53 offer PDNS as a premium service for targeted use cases, balancing costs with enhanced privacy benefits. Note that the latter two scenarios can coexist, facilitating gradual PDNS deployment at both ReRs and ANSes.

5 SYSTEM SECURITY

Defend DoS and reflection attacks – PDNS’s mechanism to handle cache misses is susceptible to 1) DoS on ANSes, and 2) a “reflection” attack towards the ReR (see § 3.1). We here present a solution to protect against both attacks.

ANSes should only accept direct queries for a domain d from users who can *prove* an actual cache miss occurred at the ReR. In order to prove the existence of a cache miss, the user forwards to the ANS the encrypted query and its response (q, r) along with its secret key qk . To prevent a malicious user from counterfeiting (q, r) , we require the PDNS ReR to sign an additional message containing the user IP, query timestamp, and the pair (q, r) . With this information, the ANS can check whether q encrypts a query for d , and r indeed refers to a recent cache miss from the contacting IP.

The above solution has two major limitations though. First, sharing the secret key qk can be dangerous, as a misbehaving ANS could collude with PDNS ReR causing a privacy violation. Second, according to our performance evaluation (see § 6.2), this approach would bloat direct DNS queries with about 39KB extra traffic: 36.5KB from (q, r) , about 2KB from the certificate, and few bytes for timestamp and IP address. It also requires additional computation at ANSes for verification, but the overhead is moderate: the challenge increases CPU usage by only 17%, even if all queries require verification (see § 6.2 and Appendix D).

We solve both issues by asking for cache misses proofs only for *frequent* requests, *i.e.*, within a domain’s TTL, which might indicate a potential attack. To do so, the ANS keeps track of the time at which it populated a domain record at a given PDNS ReR. Further, in presence of such (rare) proof request the user would send a new query for the same domain to the ReR using *backup* key pairs; this query is needed to generate a proof without leaking the user’s main private key. After a successful proof, the user runs the *SetupUser* primitive (<0.15 sec, see Appendix D) to generate new backup key pairs. The ANS answers the direct DNS query right away regardless of whether the proof was requested, unless a pending proof for this IP already exists. However, it holds on the reception of the proof to update the PDNS ReR.

It is noteworthy that the above process only applies to the additional traffic to ANSes because of the adoption of PDNS. It can be distinguished from existing traffic to the ANSes by the presence of the custom EDNS-PR extension flag. Existing traffic, e.g., measurement queries for performance monitoring, remains unaffected and continues to operate under the current DoS defense mechanisms in place for ANSes today.

Identify misbehavior of ReRs – ReRs acting as covert adversaries may selectively drop DNS records from their caches for specific users to gain access to their queries. This can be mitigated through the cache miss proof process introduced above. Specifically, suppose a ReR avoids caching a domain d for user u . If d was previously queried by u or other users within the valid cache period, u ’s query would trigger a cache miss and initiate an iterative query to the ANS. The ANS would then challenge u , as the record should not have expired in the ReR’s cache. But u can submit a cache miss proof. This would in turn reveal ReR’s misbehavior.

Note that such accusations may occasionally result in false positives due to reliability issues, such as ReRs rebooting because of power outages or software bugs. A robust credit system for PDNS ReRs, combined with additional verification processes for handling various incidents, should help mitigate these false positives. We leave further exploration of these measures for future work.

Validate ANSes – An attacker may impersonate an ANS and either launch a DoS attack at a PDNS ReR or pollute its cache. However, in PDNS, only legitimate ANSes can populate the cache of a ReR, allowing for simple access control. PDNS ReRs should only accept DNS records from verified ANSes. The verification can be done via regular DNS lookups, or more strictly DNSSEC [32] avoiding DNS hijacking [81], confirming with top-level ANSes that the IP address of a sender matches that of the final ANS of the domain name in a DNS record.

6 IMPLEMENTATION

6.1 Implementation Details

PIR scheme selection – Appendix B.2 lists three state-of-the-art single-server PIR solutions we have benchmarked for different cache and slot sizes using a single core of 3.0 GHz AMD EPYC CPU. SimplePIR [68] achieves the fastest query processing time overall. However, it is stateful, meaning that a user has to download a state (with size comparable to the square root of the database size) from the ReR whenever its DNS cache is updated. Given that a ReR’s cache updates frequently, we discard this solution.

We instead favor single-server stateless PIRs: SealPIR [31] and Spiral [91]. SealPIR is slightly faster than Spiral when considering smaller cache and slot sizes, while Spiral outperforms SealPIR when assuming slots with large sizes. This is because Spiral does not provide optimal parameters for caches with small slot size; each slot with a size smaller than 256B simply gets padded to 256B. Spiral also requires less traffic than SealPIR (0.1x to 0.12x) for both the *Query* and *Answer* primitives. Though Spiral has a slightly longer update time than SealPIR, this is a server-only operation requiring less than < 1 ms, and is thus not a decisive factor. Therefore, we select Spiral as the underlying PIR protocol for building the proof-of-concept of PDNS. But we do note that PDNS is open to any future single-server stateless PIR protocols.

Spiral optimizations – We have applied some changes to optimize the performance of Spiral. Specifically, Spiral’s *Answer* primitive operates on 4 chunks of ciphertext for slots smaller than 2^{15} bytes; as the slot size increases, the number of chunks grows as a factor of 4. It follows that (at least) 4 concurrent threads can be used to parallelize and thus speed up the operations on each chunk. We leverage this observation to extend the current Spiral implementation to support increased multi-threading. We also enable the Intel Advanced Vector Extensions 2 [10] when running Spiral. This allows a 2x speedup of the *Answer* primitive in our benchmark.

PDNS ReR and client – We develop a custom PDNS ReR using the Rust-based Spiral PIR repository [5]. We opt for this approach, instead of extending an existing resolver, since PDNS ReR’s workflow departs from a regular ReR, mainly due to the lack of iterative lookup to handle cache misses. We also leverage the Spiral repository to develop the PDNS client. While integrating the PDNS client

into the OS would provide better performance, we opt for a DNS proxy for better flexibility and ease of adoption. The proxy intercepts outgoing DNS queries, transforms them into PIR queries, receives responses from PDNS ReR, and decodes the results. In presence of a cache miss, the proxy also performs (shortcut) iterative DNS lookups. In the end, the proxy constructs DNS responses itself using answers from either ReR or ANS, in presence of a cache miss, and returns them to the OS.

Authoritative name server – PDNS requires three main changes at a participating ANS. First, support for EDNS-PR, our small extension of EDNS(0) to share the IP address of the ReR when a cache miss has occurred. Second, a routine to forward a DNS record to the ReR indicated in EDNS-PR. Third, a mechanism to challenge clients for proof of cache misses when needed (see § 5). We implement the above features as a patch (about 200 lines of code) of the popular Berkeley Internet Name Domain (BIND9) [3], a fully-fledged open-source resolver used by many ANSes worldwide [19].

6.2 Benchmarking

We benchmark all three components of PDNS: client, ReR, and ANS on machines equipped with an 8-core 3.0GHz AMD EPYC CPU and 8 GB RAM. This is an upgrade setup from [116] because PDNS is more computationally intensive compared to ODoH. Note that while PIR operations happen on the *encoded* cache, we use the size of the *plaintext* cache as a reference since it directly relates to the number of DNS records it can store. We ignore network latency in this benchmarking; we will instead introduce realistic latencies in the evaluation (§ 7). We assume PDNS was previously setup and ready to use, *i.e.*, we ignore the one-time cost of *SetupServer* and *SetupClient* (as defined in § 3.2). The interested reader can find benchmarking for both setup PIR primitives as well as resource consumption in Appendix D.

Query duration – Each PDNS query involves four PIR primitives: *Index*, *Query* and *Extract* at the user, and *Answer* at the PDNS ReR. Figure 3(a) shows the query duration for each primitive assuming (plaintext) caches composed of between 2^{10} (1K) and 2^{20} (1M) 512-Bytes slots, *i.e.*, total cache sizes ranging between 0.5 MB and 512 MB. These values are chosen because Spiral’s authors selected optimal low-level cryptographic parameters for this range based on a heuristic algorithm. It follows that each 512B-slot can hold about 13 DNS records with average size of 38 Bytes (see Figure 2). The PIR primitives at the user (*Index*, *Query*, and *Extract*) require sub-millisecond durations and, as expected, are independent from the cache size. The total query duration is dominated by the *Answer* PIR (at the server side) which requires between 80 ms – on a small cache with about 1,000 slots and up to about 13K DNS records – and up to 500 ms – on a large cache which might contain several million DNS records.

Next, we fix the cache size to 512 MB and investigate query duration as the number of slots increases, *i.e.*, the size of each slot decreases. For example, a 512 MB cache can be composed of either 2^{10} slots with a size $S = 512\text{KB}$, or 2^{20} slots with $S = 512\text{B}$. Figure 3(b) shows that the duration of the *Index* and *Query* primitives (at the user) are unaffected by the slot size. Conversely, the duration of the *Extract* primitive, also at the user, decreases as the slot size decreases, although non-linearly, *e.g.*, from 266 ms

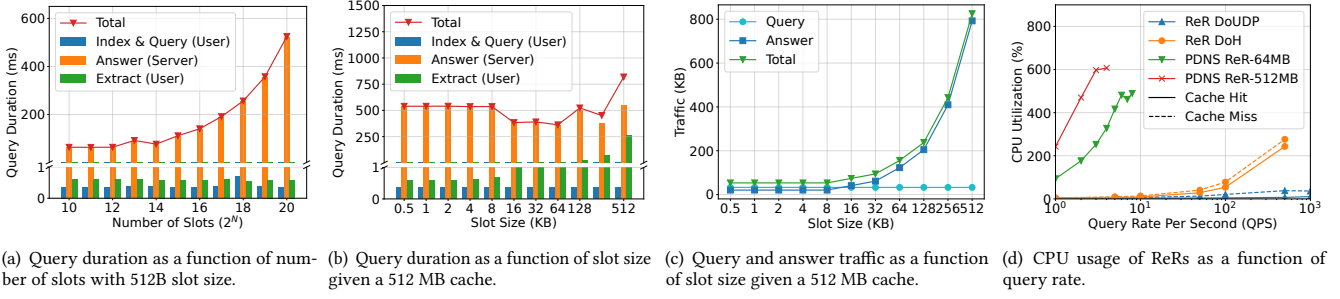


Figure 3: Benchmarking results for PDNS. Network latency is negligible.

($S = 512\text{KB}$) down to 21 ms ($S = 128\text{KB}$). This nonlinearity comes from the better optimizations of Spiral for large slot sizes.

For *Answer* (server side), the impact of the slot size is non-trivial due to the conflicts and compromises between multiple underlying cryptographic primitives. Its performance is best when $S = 64\text{KB}$ and worsens when the slot size either increases or decreases. Given the *Answer* primitive has an overall much higher duration than all other primitives, the total duration of the PIR query is the fastest (362 ms) for $S = 64\text{KB}$ to which it corresponds 2^{13} slots in a large 512 MB cache. This is a $\sim 40\%$ drop from 539 ms when assuming a small slot ($S = 512\text{B}$) and a $\sim 55\%$ drop from 819 ms with a large slot ($S = 512\text{KB}$).

Query and answer traffic – First, we focus on the traffic between PDNS client and ReR. Figure 3(c) shows the traffic for both queries (PDNS client) and answers (ReR), assuming a cache size of 512 MB and increasing slot sizes (decreasing numbers of slots). Refer to Appendix D for an analysis of the impact of different cache sizes. At the client, each query consumes a constant 32 KB independently of the slot size, since the query is the encryption of an index. At the ReR, the traffic increases as the slot size increases since a full slot is returned. For example, the answer to a query contains 20KB when there are 2^{16} slots ($S = 8\text{KB}$), versus nearly 800KB when there are 2^{10} slots ($S = 512\text{KB}$). Considering both query duration (Figure 3(b)) and traffic (Figure 3(c)), we select a cache *shape* for PDNS of 2^{15} slots with a size of 16KB, for a total cache size of 512MB.

Next, we focus on the traffic between PDNS client and an ANS in presence of cache misses. Since PDNS require DoH, this increases the traffic from around 200B, *i.e.*, a DoUDP query from ReR to an ANS, to about $\sim 7\text{KB}$ [36, 118] because of the TLS handshake – $\sim 1\text{KB}$ is needed instead if HTTPS connection is reused. Next, the ANS also needs to duplicate the query response to the PDNS ReR with DoH, which doubles the costs. Overall, this is a significant bandwidth increase for an ANS mostly due to DoH. However, the current adoption of DoUDP between ReRs and ANSes is yet-another violation of user privacy when EDNS(0) is adopted [66, 101]. Proposals have been made to encrypt the channel between ReR and the ANS [72]. If this proposal is adopted, then PDNS doubles the ANS traffic.

Scalability – PDNS’s intensive CPU usage is expected to limit its *query rate*, *i.e.*, the concurrent number of queries per second (QPS) it can handle. We compare the query rate of PDNS with both DoUDP and DoH provided by BIND9 [3]. We do not report numbers for ODoH since equivalent to DoH for the ReR. For each protocol, we increase the query rate until the query duration increases by 50%,

and then report the previous CPU usage and rate. Figure 3(d) shows that DoUDP and DoH scale much better as they can serve roughly 1,000 QPS (CPU usage of 32%) and 500 QPS (CPU usage of 200%) before significantly delaying their respective query response times. In comparison, PDNS ReR reaches a query rate of 4 and 8 QPS for respectively a large (512 MB) and small cache (64 MB).³ While the ReR’s CPU is not fully utilized (500-600%), adding even one extra query would increase the query duration by more than 50%.

It has to be noted that the uprising specialized hardware would substantially improve PDNS scalability. In fact, assuming that the query resolution reduces from few hundreds ms down to 1 ms [109], then PDNS would be able to reach about 1,000 QPS without HTTPS or hundreds of QPS with HTTPS, similar to DoH in Figure 3(d). The figure also differentiates between queries triggering a cache hit or a miss. At their maximum query rate, the iterative process associated with a cache miss costs an extra 33% CPU usage for both DoUDP and DoH. No impact is observed for PDNS as cache misses are resolved at the client and not the ReR.

Finally, we also benchmark the CPU usage at the ANS, using the same methodology adopted for the ReR (see Appendix D). Our results show that the CPU usage at ANS for answering DoUDP queries is negligible: only 7% with a rate of 1,000 QPS. DoH is instead much more challenging, but still reaches a rate of 500 QPS with a CPU usage of 240%. Note that the combination of extra bandwidth and CPU might explain the current lack of adoption of DoH among ANSes (see § 4.3). In addition to DoH, PDNS further adds 50% CPU usage to support EDNS-PR queries, *i.e.*, privately populate DNS records at a ReR, and another 50% to validate proof of cache miss for suspicious queries.

7 PDNS EVALUATION

This section evaluates PDNS. Given that an actual PDNS deployment is challenging, *e.g.*, it requires participating ANSes and users, we resort to the next most realistic setup. We set up a test-bed consisting of a PDNS client, ReR, and a participating final ANS. Next, we simulate real network latencies and DNS queries we have collected in the wild. We then evaluate PDNS from four perspectives: query duration, privacy guarantees, resilience to attacks, and

³While there is no broad consensus on the memory size typically deployed at ReRs, we believe our setup is feasible for most providers. One DNS trace in [114] shows that over 200M queries were reduced to approximately 2M unique hostnames queried by over 8,000 users at a university over one week. This is only slightly more than what our small cache (64MB, 1.6M hostnames) can accommodate. Considering record replacement (a common practice for ReRs), the small cache is sufficient. A large cache (512MB, 13M hostnames) can support significantly more users.

impact on Web performance. When possible, we compare PDNS against state-of-the-art solutions: DoUDP, DoH, ODoH, and DoHoT. We further include a hypothetical ReR-Less DNS assuming both DoUDP and DoH. Due to space constraints, please refer to Appendix E.1 for the detailed evaluation setup.

7.1 Performance

Figure 4(a) shows boxplots of query duration per DNS protocol. For PDNS, we differentiate between small (64MB, up to 1.6M entries) and large (512MB, up to 13M entries) caches, as well as a *futuristic* implementation relying on F1 hardware [109] with a large cache. While we cannot obtain such hardware yet, we simulate its performance assuming that the Answer primitive would only require 5ms.⁴ We further distinguish between queries which triggered cache misses or not, and whether HTTPS connection reuse was adopted.

Figure 4(a) shows that DoUDP, *i.e.*, DNS without any security or privacy guarantees, achieves the best performance with a median query time of 25 ms, which is slightly longer than the median RTT of 22 ms between our emulated users (via Mysterium as detailed in Appendix E.1) and the ReR – thus confirming negligible time spent at both client and ReR to handle a DNS query. DoH almost triples the query duration from DoUDP (median of 69 ms) due to the two additional RTTs (~ 45 ms) required by TLSv1.3; as expected, the query duration in DoH drops to 28 ms in presence of connection reuse. ODoH – which further enhances user privacy while sacrificing performance – achieves a median query duration of 272 ms, which reduces to 63 ms with connection reuse.

In the case of ReR-Less DNS, when utilizing DoUDP, the median latency is around 84 ms with considerable variability. When emulating ReR-Less DoH (emulation is required as ANSes currently do not support DoH), which is necessary to protect from pervasive DNS monitoring, latency significantly increases, with a median exceeding 250 ms and the third-quarter latency reaching above 450 ms. Our analysis assumes no HTTPS connection re-use, as ReR-Less DoH requires establishing new HTTPS connections with various ANSes, reducing the likelihood of benefiting from persistent HTTPS connections, except perhaps with root/TLD ANSes.

Notably, these results reflect the performance of ReR-Less DoH from the perspective of a single user with relatively good bandwidth and location, and are limited to top-ranked domains. The performance for average users worldwide is likely to be significantly lower than what we have observed, due to an inflated network path to an ANS. Further, these results do not account for the extra load incurred on ANSes if ReRs are bypassed globally. Such loads can only be amortized via more hardware or by slowing down queries.

PDNS achieves median query durations of 208 ms and 450 ms for cache sizes of 64MB and 512MB, respectively. This means that PDNS is slightly faster than DoH and ReR-Less DoH assuming a small cache, and no connection reuse. While HTTPS connection reuse is also beneficial to PDNS, the benefit is less evident compared

to DoH and ODoH because CPU processing is the main bottleneck of PDNS. When considering a much bigger cache, PDNS pay a penalty of 180ms when compared with ODoH. Still, the median query latency is 2x faster than DoHoT. This shows that the performance of PDNS is already acceptable today, especially from a user-experience perspective § 7.3 and to the many people who care about their privacy.

Hardware acceleration – The most time-consuming component in PDNS is the homomorphic ciphertext evaluation in PIR. This bottleneck can be eliminated by dedicated hardware acceleration tools [42, 61, 90, 109, 110]. Among these, F1 and Intel HERACLES [42] report potential reductions of the processing time by four or five orders of magnitude, which will make PDNS’s performance comparable with DoH and better than ODoH (Figure 4(a)) while providing better privacy protection. In contrast, existing solutions, *e.g.*, ODoH, ReR-Less DNS, and DoHoT, are constrained by network latency, hence leaving little space for performance improvements.

7.2 Privacy and Security

Information exposure to ANSes – PDNS utilizes the presence of ReRs to decrease the frequency of iterative DNS lookups, thereby reducing information exposure to ANSes. In our simulation, we observed a cache miss rate of less than 10%. Within this rate, 90% was caused by expired entries, and 10% by uncached entries. While our cache miss rate is lower than some previous studies (30% was reported [40]), the pattern of cache misses being primarily due to expired entries is consistent with these findings. Therefore, in 90% of cache miss cases in PDNS, users only need to contact the final ANSes, minimizing exposure to non-final ANSes.

In short, PDNS cuts down 70% to 90% of the ANS queries required by ReR-Less DNS. For the remaining traffic directed to ANSes, only roughly 10% require interactions with non-final ANSes. Such limited exposure will likely disrupt the frequencies of sub-domains observed at non-final ANSes, similar to Figure 4(c). This achievement aligns with our goal to minimize user interactions with ANSes and reduce privacy risks, even though we consider these risks acceptable today. In contrast, ReR-Less DNS leads to the exposure of all user information to ANSes and, on average, causes a 4x to 16x increase in their workload compared to the current norms [60]. The impact is more pronounced at ANSes for popular domains, where the workload can increase by ~ 100 x.

Resilience to timing attacks – Next, we investigate the efficacy of employing random response delays as a strategic defense mechanism against timing attacks. Comprehensive findings outlined in Appendix G substantiate the fact that our proposed solution effectively thwarts such attacks when the delay duration matches or exceeds the query interval. Additionally, these results unveil a trade-off dynamic between the average response forwarding delay and the magnitude of defense effectiveness.

Resilience to reflection attacks – We proceed to evaluate PDNS resilience to reflection attacks. We simulate attackers launching reflection attacks by pretending to experience cache misses. As Figure 4(b) shows, without the security feature introduced in § 5, a single attacker can generate over 100MB of traffic per second, and the traffic grows linearly as the number of attackers grows. In

⁴With the anticipated *at least* $10^3 \times$ speedups to CPU by FHE accelerators, PIR computation time would be reduced to sub-milliseconds. However, data movement must also be considered. F1 [109] envisions a memory bandwidth of 1TB/s (with even higher bandwidths possible, *e.g.*, NVLink achieving 2.4TB/s [13]). Transferring data for a large cache (*e.g.*, 512MB plaintext expanded to 4GB due to FHE encoding) would take 4ms at 1TBps. We round up to 5ms for the complete operation.

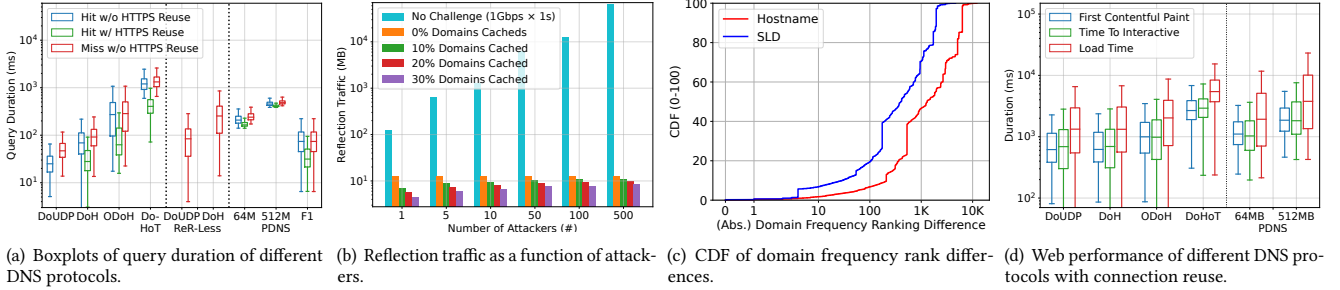


Figure 4: Evaluation of PDNS.

contrast, our security mechanism reduces significantly and puts a deterministic cap on the reflection traffic. Given the space constraints, we leave the full result analysis in Appendix E.3.

Preserving regional access pattern – In addition to the collusion resistance guaranteed by its cryptographic theorems [63, 104], PDNS features an (arguable) privacy benefit that might be ahead of its time: preserving regional access patterns from the ReR. To demonstrate this, please refer to Figure 4(c) which shows the CDF of domain (hostname or SLD) popularity rank difference (absolute value) obtained with and without PIR (ground truth). For instance, “cnn.com” has a ranking difference of 23,270 since it is ranked 104,614th without PDNS but 81,344th assuming PDNS. This figure relies on a trace of 20 million DNS queries of 122K unique domains we collected. Overall, the figure confirms the preservation of regional pattern by PDNS as the overall ranking has been disrupted. For example, 99% of the 122K hostnames in our traces have an absolute ranking difference larger than 100 (and 40% larger than 10K). Similar results apply to SLD.

7.3 User Experience (Web Performance)

We use web performance as a proxy to evaluate PDNS’s real-world performance and its impact on end-user experience. This is done via WebPageTest [17] to automate Chrome (on Linux) and both perform web page loads and collect telemetry, e.g., classic web performance metrics: FirstContentful Paint (FCP), Time To Interactive (TTI), and PageLoadTime (PLT). We target the top 1,000 websites from Tranco [16] which are loaded 5 times per configuration and then report the median of each metric. We test each website using all DNS solutions studied so far except ReR-Less DNS since no DoH is supported by ANSes today, and assuming HTTPS connection reuse, since it is a realistic behavior of different OSes and browsers [41]. We use Cloudflare as a public ReR for existing DNS protocols, and our ReR for PDNS while injecting the latency measured between testing client and Cloudflare (2-3ms). Note that our testing machine connects to the Internet with a symmetric upload/download bandwidth of ~100 Mbps.

Overall, the Web performance tests (Figure 4(d)) confirm the results of the query duration (Figure 4(a)), with DoUDP being the fastest protocol and DoHoT being the slowest. When using a small cache, PDNS has performance comparable with ODoH, with a difference of less than 100 ms per metric which can hardly be perceived by the user. Still, ODoH outperforms PDNS with a large cache, saving ~900 ms for FCP/TTI which may indeed be perceived by the user, but at the cost of user privacy.

8 RELATED WORK

DNS – In addition to the mainstream DNS systems discussed in § 2 and evaluated in § 7, privacy-aimed amendments to these proposals exist. For example, Di Bella et al. [54] propose a secret-sharing scheme for anonymous DNS queries relying on a peer-to-peer proxy network. However, it is not robust when there are many malicious users in the system. EncDNS [69] has a similar system design to ODoH but is less flexible in key distribution mechanism, deployability, and compatibility. PINOT [119] proposes to obfuscate DNS traffic at the border of a trusted network to preserve user anonymity. None of these solutions satisfy our privacy goals.

PIR-based DNS systems – Few previous studies consider adopting PIR into DNS. Differently from PDNS, they require significant modifications of the modern DNS architecture. A recent efficient stateful PIR benchmarks its performance on private DNS queries [125] assuming a single PIR server storing all the DNS records. This ignores the self-governing nature of the DNS across all ANSes. It is also not practical from the performance perspective. Lu and Tsudik [85] propose a DNS system based on distributed hash tables and single-server PIR, where DNS records are stored in a table split into chunks assigned to different ReRs. The main drawback of this is that a query reveals the “chunk” of DNS records it is contained in, which can be used to analyze user preferences. Previous work also consider DNS with two-server PIR [115, 124], which does not offer collusion resistance.

9 DISCUSSION AND LIMITATIONS

Limitation on anycast – PDNS does not support *anycast* [27, 99], a network addressing and routing methodology which allows a single IP address to be shared by multiple ReRs around the world [21, 24]. This is because a ReR’s cache is populated by participating final ANSes. If anycast were to be implemented for PDNS ReR, an ANS located in a different area than the user would route the DNS response to a different ReR than the original one queried by the user.

Cluster of PDNS ReR – In a realistic deployment, a PDNS ReR consists of potentially multiple clusters of resolvers located at different locations. The user would select the closest location either manually or by using some self-configuring software. As this selection occurs, the user would register to a ReR which implies learning about the cache size N and compute and share pk (see § 3.3). We assume that servers within the same cluster (*i.e.*, one single IP) share a synchronized cache, *i.e.*, having same size and content. This implies

that pk can be shared among such servers, and load balancing of both queries and DNS record updates is straightforward.

DoH support at ANSes – As noted in § 4.3, ANSes currently do not support DoH. This is mainly due to the lack of incentives: currently, ANSes only communicate with ReRs, where privacy exposure in this link is less concerned. Thus, the benefits of supporting DoH on ANSes do not outweigh the costs. However, with the introduction of PDNS, ANSes will communicate directly with end-users. Implementing DoH at ANS would enhance the privacy protections for websites under ANS-controlled domains, which is particularly valuable for those offering sensitive content or for customers who prioritize privacy. This provides a much stronger incentive for ANSes to support DoH. While we cannot precisely predict future support of DoH by ANSes, we anticipate it will increase rapidly, like the history of HTTPS, once PDNS is deployed.

ReR in a Trusted Execution Environment (TEE) – This approach allows to verify, through a hardware vendor, that the ReR’s code corresponds to an open-source non-logging implementation. Relying on TEEs [108] inherently introduces a reliance on hardware vendors, which contradicts our objective of eliminating non-collusion agreements. It also adds another point of failure, as TEEs are not free from bugs and security breaches [26]. Further, TEEs often have limited memory [9], constraining the ReR functionality. Finally, it imposes a great burden on TEE vendors while negatively impacting user experience, as every ReR attestation requires communication with an attestation server at TEE vendor.

Multi-service Internet companies – In some cases, companies operate diverse businesses. For instance, Google and Cloudflare simultaneously provide ReR and (final) ANS services. This positions them as critical junctions in the Internet, aggregating a wealth of information from these different operations. DoHoT and PDNS stand out in offering optimal joint privacy protection to users in such scenarios. Notably, ReR-Less DoH and PDNS require ANSes to receive direct queries from users, potentially revealing their identities. As discussed earlier, we deem this acceptable since this information would be accessible to final ANSes through other means anyway. Still, we aim to minimize information exposure. ReR-Less DoH exposes 100% of the DNS queries to all ANSes. In contrast, PDNS limits this by directing only 3% of the queries to non-final ANSes and 30% to final ANSes (§ 7.2). Additionally, PDNS provides security guarantees to ANSes thanks to its query validation scheme (§ 5), which is instead not viable in ReR-Less DNS. DoHoT, on the other hand, sacrifices performance but preserves information exposure. We therefore conclude that PDNS and DoHoT are the preferable choices here, minimizing information exposure jointly at both ReR and ANS for multi-service companies.

Third-party final ANSes – Many small/medium businesses rely on third-party final ANS services such as Route 53 [2]. In this case, PDNS direct ANSes queries – in presence of cache misses – would leak some information to a third party which does not already have access to this information via direct traffic, e.g., HTTP(S) in case of a webpage. The solution to handle such privacy leaks is for Route 53 to implement support for the PIR protocol used by PDNS ReR. In this setup, the PDNS ReR’s cache record for a domain name would include only the IP address of the final ANS and a distinct flag,

signaling users to communicate directly with the final ANS using the PIR protocol. We leave this as future work.

Resistance to Internet centralization – The trend of Internet centralization has been evident over the past decades, with a few hyper-giants controlling major portions of Internet resources. This centralization impacts the DNS as well [73, 82], with studies [102] showing that Google and Cloudflare handle about half of all ReR queries. Such centralization threatens user privacy. Existing DNS privacy solutions, like rotating ReRs or proxies, are also negatively affected by this trend due to the decreasing number of available options. In contrast, PDNS resists centralization as it ensures ReRs are blind to the queries they receive. In fact, more population using the same PDNS ReR improves user privacy by raising cache hit rates and complicating potential cache miss analysis for ReRs. Similar resistance applies to the centralization of final ANSes following the above discussion of “Third-Party Final ANSes”. Overall, once scalability issues are addressed by near-future hardware accelerators, PDNS will be more advantageous than other solutions in the trend of Internet centralization.

User privacy beyond DNS – This paper focuses on DNS privacy, a critical aspect of online privacy, as DNS serves as a central point where all online activity converges. Unlike web requests, which are decentralized and require compromising multiple ANSes or web providers to gain comprehensive insights, DNS represents a unique vulnerability and therefore demands stronger privacy guarantees.

Nevertheless, we acknowledge that PDNS is limited to DNS privacy and does not address privacy concerns beyond DNS. Users may still leak information with PDNS when interacting with other online services, such as web browsing. Various solutions exist for different online activities, such as search and browsing [28, 51, 65, 67, 100, 123]. Notably, one alternative to PDNS – DoHoT – leverages Tor which extends privacy protection beyond DNS to general web activities. While this paper advocates for PDNS, this does not imply opposition to DoHoT or Tor as a whole. On the contrary, PDNS can complement Tor and other privacy-preserving technologies.

10 CONCLUSION

DNS still suffers from privacy infringements [14] despite the recent adoption of encryption (DoH), and new proposals to de-associate a user identity with her query (ODOH). The main culprit of such privacy violation is the *recursive resolver* (ReR) whose role is to provide distributed caching to DNS enabling its scalability and fast speed. While some recent provocative proposals argue for its removal – which would naturally address such privacy concerns – such approaches bring up new security issues and thus are unfeasible. We instead proposed PDNS, to our knowledge the first proof-of-concept to allow ReRs to operate privately leveraging single-server PIR. The integration of DNS and PIR is not straightforward and our design navigates many performance and privacy trade-offs. Although PDNS slightly relaxes the collusion assumptions concerning millions of authoritative name servers, it significantly enhances DNS privacy beyond existing methods. PDNS is financially viable to operate today and has significant potential for further performance improvements, despite that it already outperforms the only other solution, DoHoT, that offers the same level of privacy protection.

REFERENCES

- [1] Add Service - AWS Pricing Calculator. <https://calculator.aws/#/addService/ec2-enhancement>. Accessed in 2024.
- [2] Aws route 53. <https://aws.amazon.com/route53/>.
- [3] Bind 9. <https://www.isc.org/bind/>.
- [4] BIND DoH Update. <https://www.isc.org/blogs/bind-doh-update-2021/>.
- [5] Blyss (Previously Spiral-rs). <https://github.com/blyssprivacy/sdk>.
- [6] dig(1): DNS lookup utility - Linux man page - Die.net. <https://linux.die.net/man/1/dig>.
- [7] Dnscrypt. <https://www.dnscrypt.org/>.
- [8] Google Cloud Pricing Calculator. <https://calculator.aws/#/addService/ec2-enhancement>. Accessed in 2024.
- [9] Intel® Software Guard Extensions (Intel® SGX) SDK for Linux® OS Developer Reference. https://download.01.org/intel-sgx/sgx-linux/2.10/docs/Intel_SGX_Developer_Reference_Linux_2.10_Open_Source.pdf. Accessed in 2024.
- [10] Intrinsics for Intel® Advanced Vector Extensions 2 (Intel® AVX2). <https://www.intel.com/content/www/us/en/develop/documentation/cpp-compiler-developer-guide-and-reference/top/compiler-reference/intrinsics/intrinsics-for-avx2.html>.
- [11] Linux traffic control (tc). <https://man7.org/linux/man-pages/man8/tc.8.html>.
- [12] Mysterium network: Censorship free Internet for all. <https://mysterium.network/>.
- [13] NVIDIA NVSWITCH: The World's Highest-Bandwidth On-Node Switch. <https://images.nvidia.com/content/pdf/nvswitch-technical-overview.pdf>. Accessed in 2024.
- [14] USA v. Sussmann, 2022 WL 1124755 (D.D.C. 2022).
- [15] Tor Code Audit Finds 17 Vulnerabilities. <https://www.securityweek.com/tor-code-audit-finds-17-vulnerabilities/>. Accessed in 2024.
- [16] Tranco: A Research-Oriented Top Sites Ranking Hardened Against Manipulation. <https://tranco-list.eu/>.
- [17] WebPageTest. <https://github.com/WPO-Foundation/webpagetest>.
- [18] What is DNS? | How DNS works | Cloudflare. <https://www.cloudflare.com/learning/dns/what-is-dns/>.
- [19] When to replace BIND DNS. <https://bluecatnetworks.com/blog/when-to-replace-bind-dns/>.
- [20] Domain names - implementation and specification. RFC 1035, Nov. 1987.
- [21] Cloudflare DNS, 2022. <https://www.cloudflare.com/dns/>.
- [22] Firefox DNS-over-HTTPS., 2022. <https://support.mozilla.org/en-US/kb/firefox-dns-over-https>.
- [23] Google Public DNS: DNS over HTTPS (DoH), 2022. <https://developers.google.com/speed/public-dns/docs/doh>.
- [24] Introduction to Google Public DNS, 2022. <https://developers.google.com/speed/public-dns/docs/intro>.
- [25] The chromium projects: DNS over HTTPS (aka DoH), 2022. <https://www.chromium.org/developers/dns-over-https/>.
- [26] Intel patches up SGX best it can after another load of security holes found, 2023. https://www.theregister.com/2023/02/15/intel_sgx_vulns/.
- [27] J. Abley and K. E. Lindqvist. Operation of anycast services. *RFC*, 4786:1–24, 2006.
- [28] G. Aggarwal, E. Bursztein, C. Jackson, and D. Boneh. An analysis of private browsing modes in modern browsers. In *19th USENIX Security Symposium, Washington, DC, USA, August 11–13, 2010, Proceedings*, pages 79–94. USENIX Association, 2010.
- [29] A. Ali, T. Lepoint, S. Patel, M. Raykova, P. Schoppmann, K. Seth, and K. Yeo. {Communication–Computation} trade-offs in {PIR}. In *30th USENIX Security Symposium (USENIX Security 21)*, pages 1811–1828, 2021.
- [30] M. Anagnostopoulos, G. Kambourakis, P. Kopanos, G. Louloudakis, and S. Gritzalis. DNS amplification attack revisited. *Comput. Secur.*, 39:475–485, 2013.
- [31] S. Angel, H. Chen, K. Laine, and S. Setty. Pir with compressed queries and amortized query processing. In *2018 IEEE symposium on security and privacy (SP)*, pages 962–979. IEEE, 2018.
- [32] R. Arends, R. Austein, M. Larson, D. Massey, and S. Rose. DNS security introduction and requirements. *RFC*, 4033:1–21, 2005.
- [33] Y. Aumann and Y. Lindell. Security against covert adversaries: Efficient protocols for realistic adversaries. *J. Cryptol.*, 23(2):281–343, 2010.
- [34] H. Ballani and P. Francis. Mitigating DNS dos attacks. In *Proceedings of the 2008 ACM Conference on Computer and Communications Security, CCS 2008, Alexandria, Virginia, USA, October 27–31, 2008*, pages 189–198. ACM, 2008.
- [35] S. Bortzmeyer, R. Dolmans, and P. Hoffman. DNS query name minimisation to improve privacy. *RFC*, 9156:1–11, 2021.
- [36] T. Böttger, F. Cuadrado, G. Antichi, E. L. Fernandes, G. Tyson, I. Castro, and S. Uhlig. An empirical study of the cost of dns-over-https. In *Proceedings of the Internet Measurement Conference*, pages 15–21, 2019.
- [37] Z. Brakerski, C. Gentry, and V. Vaikuntanathan. (leveled) fully homomorphic encryption without bootstrapping. In *Proceedings of the 3rd Innovations in Theoretical Computer Science Conference, ITCS '12*, page 309–325, New York, NY, USA, 2012. ACM.
- [38] Z. Brakerski, C. Gentry, and V. Vaikuntanathan. (leveled) fully homomorphic encryption without bootstrapping. *ACM Transactions on Computation Theory (TOCT)*, 6(3):1–36, 2014.
- [39] A. Burton, S. J. Menon, and D. J. Wu. Respire: High-rate pir for databases with small records. *Cryptology ePrint Archive*, 2024.
- [40] T. Callahan, M. Allman, and M. Rabinovich. On modern DNS behavior and properties. *Comput. Commun. Rev.*, 43(3):7–15, 2013.
- [41] P. Callejo, M. Bagnulo, J. G. Ruiz, A. Lutu, A. García-Martínez, and R. Cuevas. Measuring doh with web ads. *Comput. Networks*, 2022.
- [42] R. Cammarota. Intel heracles: homomorphic encryption revolutionary accelerator with correctness for learning-oriented end-to-end solutions. In *Proceedings of the 2022 on Cloud Computing Security Workshop*, pages 3–3, 2022.
- [43] S. Castillo Pérez. *Contributions to privacy and anonymity on the Internet: domain name system and second-generation onion routing*. 2017.
- [44] R. Chhabra, P. Murley, D. Kumar, M. Bailey, and G. Wang. Measuring dns-over-https performance around the world. In *IMC '21: ACM Internet Measurement Conference, Virtual Event, USA, November 2–4, 2021*. ACM, 2021.
- [45] B. Chor, E. Kushilevitz, O. Goldreich, and M. Sudan. Private information retrieval. *J. ACM*, 45(6):965–981, 1998.
- [46] C. Contavalli, W. van der Gaast, D. C. Lawrence, and W. Kumari. Client subnet in DNS queries. *RFC*, 7871:1–30, 2016.
- [47] H. Corrigan-Gibbs, A. Henzinger, and D. Kogan. Single-server private information retrieval with sublinear amortized time. *Cryptology ePrint Archive*, 2022.
- [48] H. Corrigan-Gibbs and D. Kogan. Private information retrieval with sublinear online time. In *Advances in Cryptology – EUROCRYPT 2020*, pages 44–75, Cham, 2020. Springer International Publishing.
- [49] L. Csikor, H. Singh, M. S. Kang, and D. M. Divakaran. Privacy of dns-over-https: Requiem for a dream? In *2021 IEEE European Symposium on Security and Privacy (EuroS&P)*, pages 252–271. IEEE, 2021.
- [50] J. Damas, M. Graff, and P. Vixie. Extension mechanisms for DNS (EDNS(0)). *RFC*, 6891:1–16, 2013.
- [51] E. Dauterman and H. Corrigan-Gibbs. Lightweb: Private web browsing without all the baggage. In *Proceedings of the 22nd ACM Workshop on Hot Topics in Networks, HotNets 2023, Cambridge, MA, USA, November 28–29, 2023*, pages 287–294. ACM, 2023.
- [52] A. Davidson, G. Pestana, and S. Celi. Frodo: Simple, scalable, single-server private information retrieval. *Proceedings on Privacy Enhancing Technologies*, 2023.
- [53] W. B. de Vries, Q. Scheitle, M. Müller, W. Toorop, R. Dolmans, and R. van Rijswijk-Deij. A first look at QNAME minimization in the domain name system. In D. R. Choffnes and M. P. Barcellos, editors, *Passive and Active Measurement – 20th International Conference, PAM 2019, Puerto Varas, Chile, March 27–29, 2019, Proceedings*, volume 11419 of *Lecture Notes in Computer Science*, pages 147–160. Springer, 2019.
- [54] G. Di Bella, C. Barcello, and I. Tinnirello. A secret sharing scheme for anonymous dns queries. In *AEIT Annual Conference 2013*, pages 1–5. IEEE, 2013.
- [55] J. Dickinson, S. Dickinson, R. Bellis, A. Mankin, and D. Wessels. DNS Transport over TCP - Implementation Requirements. *RFC* 7766, Mar. 2016.
- [56] R. Dingleline, N. Mathewson, and P. Syverson. Tor: The second-generation onion router. Technical report, Naval Research Lab Washington DC, 2004.
- [57] H. Duan, R. Fischer, J. Lou, S. Liu, D. A. Basin, and A. Perrig. RHINE: robust and high-performance internet naming with E2E authenticity. In *20th USENIX Symposium on Networked Systems Design and Implementation, NSDI 2023, Boston, MA, April 17–19, 2023*, pages 531–553. USENIX Association, 2023.
- [58] J. Fan and F. Vercauteren. Somewhat practical fully homomorphic encryption. *IACR Cryptology ePrint Archive*, 2012.
- [59] J. Fan and F. Vercauteren. Somewhat practical fully homomorphic encryption. *Cryptology ePrint Archive*, Paper 2012/144, 2012. <https://eprint.iacr.org/2012/144>.
- [60] K. Fujiwara, A. Sato, and K. Yoshida. Cache effect of shared DNS resolver. *IEICE Trans. Commun.*, 102-B(6):1170–1179, 2019.
- [61] R. Geelen, M. Van Beirendonck, H. V. Lima Pereira, B. Huffman, T. McAuley, B. Selfridge, D. Wagner, G. Dimou, I. Verbaauwhede, F. Vercauteren, et al. Basalisc: programmable hardware accelerator for bgv fully homomorphic encryption. *IACR Transactions on Cryptographic Hardware and Embedded Systems*, 2023(4):32–57, 2023.
- [62] C. Gentry. *A Fully Homomorphic Encryption Scheme*. PhD thesis, Stanford, CA, USA, 2009. AAI3382729.
- [63] C. Gentry, A. Sahai, and B. Waters. Homomorphic encryption from learning with errors: Conceptually-simpler, asymptotically-faster, attribute-based. In *Advances in Cryptology – CRYPTO 2013*, pages 75–92, Berlin, Heidelberg, 2013. Springer Berlin Heidelberg.
- [64] S. Guha and P. Francis. Identity trail: Covert surveillance using DNS. In *Privacy Enhancing Technologies, 7th International Symposium, PET 2007 Ottawa, Canada, June 20–22, 2007, Revised Selected Papers*, volume 4776 of *Lecture Notes in Computer Science*, pages 153–166. Springer, 2007.

- [65] H. Habib, J. Colnago, V. Gopalakrishnan, S. Pearman, J. Thomas, A. Acquisti, N. Christin, and L. F. Cranor. Away from prying eyes: Analyzing usage and understanding of private browsing. In M. E. Zurko and H. R. Lipford, editors, *Fourteenth Symposium on Usable Privacy and Security, SOUPS 2018, Baltimore, MD, USA, August 12-14, 2018*, pages 159–175. USENIX Association, 2018.
- [66] K. M. Henderson, T. April, and J. Livingood. Authoritative DNS-over-TLS Operational Considerations. Internet-Draft draft-hal-adot-operational-considerations-02, Internet Engineering Task Force, Aug. 2019. Work in Progress.
- [67] A. Henzinger, E. Dauterman, H. Corrigan-Gibbs, and N. Zeldovich. Private web search with tiptoe. In J. Flinn, M. I. Seltzer, P. Druschel, A. Kaufmann, and J. Mace, editors, *Proceedings of the 29th Symposium on Operating Systems Principles, SOSP 2023, Koblenz, Germany, October 23-26, 2023*, pages 396–416. ACM, 2023.
- [68] A. Henzinger, M. M. Hong, H. Corrigan-Gibbs, S. Meiklejohn, and V. Vaikanathan. One server for the price of two: Simple and fast single-server private information retrieval. *Cryptology ePrint Archive*, Paper 2022/949, 2022. <https://eprint.iacr.org/2022/949>.
- [69] D. Herrmann, K.-P. Fuchs, J. Lindemann, and H. Federrath. Encdns: A lightweight privacy-preserving name resolution service. In *European Symposium on Research in Computer Security*, pages 37–55. Springer, 2014.
- [70] N. P. Hoang, I. Lin, S. Ghavamnia, and M. Polychronakis. K-resolver: Towards decentralizing encrypted DNS resolution. *CoRR*, abs/2001.08901, 2020.
- [71] P. E. Hoffman and P. McManus. DNS Queries over HTTPS (DoH). RFC 8484, Oct. 2018.
- [72] P. E. Hoffman and P. van Dijk. Recursive to Authoritative DNS with Unauthenticated Encryption. Internet-Draft draft-ietf-dprive-opportunistic-adotq-02, Internet Engineering Task Force, Apr. 2021. Work in Progress.
- [73] A. Hounsel, K. Borgolte, P. Schmitt, and N. Feamster. D-DNS: towards decentralizing the DNS. *CoRR*, abs/2002.09055, 2020.
- [74] A. Hounsel, P. Schmitt, K. Borgolte, and N. Feamster. Encryption without centralization: distributing dns queries across recursive resolvers. In *Proceedings of the Applied Networking Research Workshop*, pages 62–68, 2021.
- [75] Z. Hu, L. Zhu, J. Heidemann, A. Mankin, D. Wessels, and P. E. Hoffman. Specification for DNS over Transport Layer Security (TLS). RFC 7858, May 2016.
- [76] D. Kales, O. Omolola, and S. Ramacher. Revisiting User Privacy for Certificate Transparency. In *2019 IEEE European Symposium on Security and Privacy (EuroS P)*, pages 432–447, 2019.
- [77] J. Katz and Y. Lindell. *Introduction to modern cryptography*. CRC press, 2020.
- [78] E. Kinnear, P. McManus, T. Pauly, T. Verma, and C. A. Wood. Oblivious DNS over HTTPS. RFC 9230, June 2022.
- [79] D. Kogan and H. Corrigan-Gibbs. Private Blocklist Lookups with Checklist. In *30th USENIX Security Symposium (USENIX Security 21)*, pages 875–892. USENIX Association, Aug. 2021.
- [80] M. Kosek, T. V. Doan, S. Huber, and V. Bajpai. Measuring dns over tcp in the era of increasing dns response sizes: A view from the edge. *ACM SIGCOMM Computer Communication Review*, 52(2), 2022.
- [81] B. Krebs. A Deep Dive on the Recent Widespread DNS Hijacking Attacks, 2019. <https://krebsonsecurity.com/2019/02/a-deep-dive-on-the-recent-widespread-dns-hijacking-attacks/>.
- [82] R. Kumar and F. E. Bustamante. Reclaiming privacy and performance over centralized DNS. *CoRR*, abs/2302.13274, 2023.
- [83] J. Kurihara, T. Tanaka, and T. Kubo. μ dns: A distributed approach to DNS anonymization with collusion resistance. *Comput. Networks*, 237:110078, 2023.
- [84] B. Li, D. Micciancio, M. Raykova, and M. Schultz-Wu. Hintless single-server private information retrieval. In *Annual International Cryptology Conference*, pages 183–217. Springer, 2024.
- [85] Y. LU. Towards plugging privacy leaks in domain name system, cornell university library. <http://arxiv.org/abs/0910.2472>, 2009.
- [86] V. Lyubashevsky, C. Peikert, and O. Regev. On ideal lattices and learning with errors over rings. *J. ACM*, 60(6), nov 2013.
- [87] Y. Ma, K. Zhong, T. Rabin, and S. Angel. Incremental Offline/Online PIR. In *31st USENIX Security Symposium (USENIX Security 22)*, Boston, MA, Aug. 2022. USENIX Association.
- [88] A. Machanavajjhala, D. Kifer, J. Gehrke, and M. Venkitasubramaniam. *L-diversity: Privacy beyond k-anonymity*. *ACM Trans. Knowl. Discov. Data*, 1(1):3, 2007.
- [89] J. Magnusson, M. Müller, A. Brunström, and T. Pulls. A second look at DNS QNAME minimization. In A. Brunström, M. Flores, and M. Fiore, editors, *Passive and Active Measurement - 24th International Conference, PAM 2023, Virtual Event, March 21-23, 2023, Proceedings*, volume 13882 of *Lecture Notes in Computer Science*, pages 496–521. Springer, 2023.
- [90] Y. Meng, S. Butt, Y. Wang, Y. Zhou, S. Simoni, et al. Intel Homomorphic Encryption Acceleration Library for FPGAs (version 2.0). <https://github.com/intel/hexl-fpga>, 2022.
- [91] S. J. Menon and D. J. Wu. SPIRAL: Fast, high-rate single-server PIR via FHE composition. In *IEEE S&P*, 2022.
- [92] S. J. Menon and D. J. Wu. Ypir: High-throughput single-server pir with silent preprocessing. *Cryptology ePrint Archive*, 2024.
- [93] M. M. Michael. High performance dynamic lock-free hash tables and list-based sets. In *Proceedings of the fourteenth annual ACM symposium on Parallel algorithms and architectures*, pages 73–82, 2002.
- [94] A. Muffett. DNS over Tor. <https://developers.cloudflare.com/1.1.1.1/other-ways-to-use-1.1.1.1/dns-over-tor/>.
- [95] A. Muffett. DoHoT: making practical use of DNS over HTTPS over Tor. <https://medium.com/@alecmuffett/dohot-making-practical-use-of-dns-over-https-over-tor-ef58d04ca06a>.
- [96] M. H. Mughees, H. Chen, and L. Ren. OnionPIR: Response Efficient Single-Server PIR. In *Proceedings of the 2021 ACM SIGSAC Conference on Computer and Communications Security*, pages 2292–2306, 2021.
- [97] M. H. Mughees and L. Ren. Vectorized batch private information retrieval. *Cryptology ePrint Archive*, 2022.
- [98] M. H. Mughees, I. Sun, and L. Ren. Simple and practical amortized sublinear private information retrieval. *Cryptology ePrint Archive*, 2023.
- [99] C. Partridge, T. Mendez, and W. Milliken. Host anycasting service. Technical report, 1993.
- [100] N. Patel. Tor networking vulnerabilities and breaches. 2016.
- [101] L. Pernal-Stoddart. The Camel's Back: Recursive to Authoritative DNS with Encryption. <https://www.centr.org/news/blog/ietf110-camel-back.html>.
- [102] R. Radu and M. Hausding. Consolidation in the dns resolver market—how much, how fast, how dangerous? *Journal of Cyber Policy*, 5(1):46–64, 2020.
- [103] A. Randall, E. Liu, G. Akiwate, R. Padmanabhan, G. M. Voelker, S. Savage, and A. Schulman. Trufflehunter: Cache snooping rare domains at large public DNS resolvers. In *IMC '20: ACM Internet Measurement Conference, Virtual Event, USA, October 27-29, 2020*, pages 50–64. ACM, 2020.
- [104] O. Regev. On lattices, learning with errors, random linear codes, and cryptography. *J. ACM*, 56(6), sep 2009.
- [105] O. Regev. On lattices, learning with errors, random linear codes, and cryptography. *Journal of the ACM (JACM)*, 56(6):1–40, 2009.
- [106] E. Rescorla. Rfc 8446: The transport layer security (tls) protocol version 1.3, 2018.
- [107] S. Rivera, V. K. Gurbani, S. Lagraa, A. K. Iannillo, and R. State. Leveraging ebpf to preserve user privacy for dns, dot, and doh queries. In *Proceedings of the 15th International Conference on Availability, Reliability and Security*, pages 1–10, 2020.
- [108] M. Sabt, M. Achemlal, and A. Bouabdallah. Trusted execution environment: What it is, and what it is not. In *2015 IEEE TrustCom/BigDataSE/ISPA, Helsinki, Finland, August 20-22, 2015, Volume 1*, pages 57–64. IEEE, 2015.
- [109] N. Samardzic, A. Feldmann, A. Krastev, S. Devadas, R. Dreslinski, C. Peikert, and D. Sanchez. F1: A fast and programmable accelerator for fully homomorphic encryption. In *MICRO-54: 54th Annual IEEE/ACM International Symposium on Microarchitecture, MICRO '21*, page 238–252, New York, NY, USA, 2021. ACM.
- [110] N. Samardzic, A. Feldmann, A. Krastev, N. Manohar, N. Genise, S. Devadas, K. Eldefrawy, C. Peikert, and D. Sanchez. Craterlake: A hardware accelerator for efficient unbounded computation on encrypted data. In *Proceedings of the 49th Annual International Symposium on Computer Architecture, ISCA '22*, page 173–187, New York, NY, USA, 2022. ACM.
- [111] P. Schmitt, A. Edmundson, A. Mankin, and N. Feamster. Oblivious DNS: Practical privacy for DNS queries. *Proceedings on Privacy Enhancing Technologies*, 2019(2):228–244, 2019.
- [112] K. Schomp, M. Allman, and M. Rabinovich. DNS resolvers considered harmful. In *Proceedings of the 13th ACM Workshop on Hot Topics in Networks, HotNets-XIII, Los Angeles, CA, USA, October 27-28, 2014*, pages 16:1–16:7. ACM, 2014.
- [113] K. Schomp, O. Bhardwaj, E. Kurdoglu, M. Muhaimen, and R. K. Sitaraman. Akamai DNS: providing authoritative answers to the world's queries. In *SIGCOMM'20, Virtual Event, USA, August 10-14, 2020*, pages 465–478. ACM, 2020.
- [114] K. Schomp, M. Rabinovich, and M. Allman. Towards a model of dns client behavior. In *International Conference on Passive and Active Network Measurement*, pages 263–275. Springer, 2016.
- [115] E. Shi, W. Aqeel, B. Chandrasekaran, and B. Maggs. Puncturable pseudorandom sets and private information retrieval with near-optimal online bandwidth and time. In *Annual International Cryptology Conference*, pages 641–669. Springer, 2021.
- [116] S. Singanamalla, S. Chunhanya, J. Hoyland, M. Vavrusa, T. Verma, P. Wu, M. Fayed, K. Heimerl, N. Sullivan, and C. A. Wood. Oblivious DNS over HTTPS (ODOH): A Practical Privacy Enhancement to DNS. *Proc. Priv. Enhancing Technol.*, 2021(4):575–592, 2021.
- [117] R. N. Staff. Ripe atlas: A global internet measurement network. *Internet Protocol Journal*, 18(3):2–26, 2015.
- [118] D. Vekshin, K. Hynek, and T. Cejka. Doh insight: detecting DNS over HTTPS by machine learning. In *ARES 2020: The 15th International Conference on Availability, Reliability and Security, Virtual Event, Ireland, August 25-28, 2020*, pages 87:1–87:8. ACM, 2020.
- [119] L. Wang, H. Kim, P. Mittal, and J. Rexford. Programmable in-network obfuscation of dns traffic. In *NDSS: DNS Privacy Workshop*. sn, 2021.
- [120] P. Winter, R. Ensafi, K. Loesing, and N. Feamster. Identifying and characterizing sybils in the tor network. In *USENIX Security Symposium*, volume 12, 2016.

- [121] Y. Xiao, Y. Gu, Y. Zhao, S. Lin, and A. Kuzmanovic. Enabling Anonymous Online Streaming Analytics at the Network Edge. *ACM Transactions on Computer Systems*, 2025.
- [122] Y. Xiao, M. Varvello, and A. Kuzmanovic. Monetizing spare bandwidth: The case of distributed vpns. *Proceedings of the ACM on Measurement and Analysis of Computing Systems*, 6(2):33:1–33:27, 2022.
- [123] Y. Xiao, Y. Zhao, S. Lin, and A. Kuzmanovic. Snatch: Online streaming analytics at the network edge. In *Proceedings of the Nineteenth European Conference on Computer Systems, EuroSys 2024, Athens, Greece, April 22-25, 2024*. ACM, 2024.
- [124] F. Zhao, Y. Hori, and K. Sakurai. Two-servers PIR based DNS query scheme with privacy-preserving. In *The 2007 International Conference on Intelligent Pervasive Computing (IPC 2007)*, pages 299–302. IEEE, 2007.
- [125] M. Zhou, A. Park, E. Shi, and W. Zheng. Piano: Extremely simple, single-server pir with sublinear server computation. *Cryptology ePrint Archive*, Paper 2023/452, 2023. <https://eprint.iacr.org/2023/452>.
- [126] M. Zhou, A. Park, E. Shi, and W. Zheng. Piano: Extremely simple, single-server pir with sublinear server computation. *Cryptology ePrint Archive*, 2023.

A ETHICS CONSIDERATIONS

Our methodology in the evaluation (Appendix E.1) uses synthetic DNS traffic via a publicly available service (Mysterium and Tor), avoiding ethical concerns. However, in § 7.2 we rely on DoUDP traces collected with a passive Mysterium node. To protect the privacy of Mysterium users, we discard user-related information such as their IP addresses and anonymize the queried domains by hashing each domain level to a random value at the time of data collection. Our institution’s IRB has deemed this data collection as non-human research, as we only collect non-identifiable private information without any accompanying data that could reveal individuals’ identities. And we have obtained Mysterium’s permission to collect data for research purposes.

B DEEP DIVE INTO PIR

B.1 PIR Construction

§ 2.2 concludes that *single-server stateless* PIR is best suited for PDNS. Consequently, we here further elaborate on the construction of this scheme. Prior to delving into PIR, we introduce homomorphic encryption, which is the key component of PIR schemes within this category [31, 91, 96].

Homomorphic Encryption (HE) – It allows to perform computation on encrypted data [38, 63, 104]. We only focus on HE that relies on a cryptographic computational hard assumption known as learning-with-error (LWE) [86, 105]. Define an HE scheme $\mathcal{HE} : \{\text{KeyGen}, \text{Enc}, \text{Dec}, \text{Eval}\}$ which contains the following algorithms:

- (1) $\text{KeyGen}(1^\kappa) \rightarrow (\text{sk}, \text{pk})$: Define a security parameter κ , 1^κ is a canonical notation to define the strength of a cryptographic scheme. This algorithm outputs a secret key sk and a public key pk .
- (2) $\text{Enc}(\text{sk}, x) \rightarrow [x]$: On input the secret key sk and an integer x , the encryption algorithm outputs a ciphertext $[x]$, which hides the x . We denote an integer in “[]” as an encrypted value.
- (3) $\text{Dec}(\text{sk}, [x]) \rightarrow x$: On input the secret key sk and a ciphertext $[x]$, the decryption algorithm outputs a plaintext x .
- (4) $\text{Eval}(\text{pk}, [x], [y], g) \rightarrow [z]$: On input the public key pk , ciphertexts $([x], [y])$, and an operator $g \in \{\text{Add}, \text{Mult}\}$, the evaluation algorithm outputs a ciphertext $[z] = g([x], [y])$. Depends on g , it is either $z = x + y$ or $z = x * y$.

For \mathcal{HE} to be secure, it is essential that adversaries without access to the secret key are unable to obtain any information about the encrypted values. Homomorphism requires that for any operation $g \in \{\text{Add}, \text{Mult}\}$ and a ciphertext $[z] = g([x], [y])$, anyone who holds a secret key can compute $\text{Dec}(\text{sk}, [z]) \rightarrow z$ which satisfies $z = g(x, y)$. The significant benefit of this property is that individuals with the public key can perform addition and multiplication operations directly on ciphertexts without requiring knowledge of the underlying values. Furthermore, it also supports a relaxed evaluation algorithm $\text{Eval}(\text{pk}, x, [y], g) \rightarrow [z]$ for relation $z = g(x, y)$. This implies the arithmetic operation between a plaintext and an encrypted value.

Construct PIR from HE – Suppose a PIR server maintains a cache $C = (c_1, \dots, c_N)$ and a user generates keys (sk, pk) by invoking KeyGen . The user shares pk with the server. To retrieve the i -th element c_i from the cache, the user encrypts a one-hot vector⁵ $\vec{q} = (q_1, \dots, q_N)$ in which only $q_i = 1$ but $q_j = 0$ for any $j \neq i$. An encrypted query $[\vec{q}] = ([q_1], \dots, [q_N])$ is then transmitted to the server that performs the homomorphic evaluation by utilizing the algorithm Eval . Specifically, it computes the inner product $[r] = C * [\vec{q}] = \sum_{j \in [N]} c_j \cdot [q_j]$ by repeatedly invoking Eval with operators Add and Mult , and then returns the response $[r]$ to the user. The user decrypts the response by $\text{Dec}(\text{sk}, [r]) \rightarrow r$. Due to the homomorphism, it satisfies that $r = \sum_{j \in [N]} c_j \cdot q_j = c_i \cdot q_i = c_i$.

Shrink Query – The concept described earlier enables the implementation of PIR at a cost of high communication overhead, as the entire encrypted query vector is transmitted. SealPIR [31] and Spiral [91] adopt different techniques for query compression and expansion that shorten the query to a constant number of ciphertexts.

Specifically, define an algorithm $\text{Expand}(\text{pk}, [i]) \rightarrow [\vec{q}]$ which takes input an encrypted index $[i]$ and outputs a length- N query vector \vec{q} . The knowledge of sk is not needed to perform Expand , thus the server is able to construct \vec{q} by itself given $[i]$. Based on this, the user only needs to send one ciphertext instead of N . We refer the readers to Section 3 of [31] and Section 2.1 of [91] for more details.

Optimize Query Processing – Note that the above approach is not feasible when N is large, e.g., $N = 4,096$ [31]. The problem is overcome by representing C as a multi-dimension hypercube [31, 91]. Take the two-dimension case as an example. Define parameters m, ℓ such that $m\ell = N$. The server constructs its cache $C = (\vec{c}_1, \dots, \vec{c}_m)$ where each row contains $\vec{c}_i = (c_i^1, \dots, c_i^\ell)$ for $i \in [m]$. To fetch c_i^j , the user constructs two ciphertexts $([i], [j])$. The server expands the queries to one-hot vectors $([\vec{q}_1], [\vec{q}_2])$, each having the i -th or j -th slot to be 1. The server first performs an HE evaluation on $[C]$ and $[\vec{q}_1]$ to extract the row $[\vec{c}_i]$, then computes another inner product on $[\vec{c}_i]$ and $[\vec{q}_2]$ to extract $[c_i^j]$.

Observe that the first inner product only involves the multiplication between plaintext and ciphertext, while the second operates purely on ciphertexts. The HE algorithm adopted in SealPIR, called FV [59], has limited ability to perform the latter one, which results in slow query processing and large response size. Spiral proposes a

⁵A one-hot vector is a binary representation of a categorical variable in which only one element is set to 1 (hot) and the rest are set to 0 (cold).

Table 2: Summary and performance analysis of state-of-the-art single-server PIR solutions.

Solution	When Cache Updates	Performance	# Number of Slots (S=64B)			Slot Size (NumSlots=2 ²⁰)		
			2 ¹⁶	2 ¹⁸	2 ²⁰	128B	512B	2,048B
SimplePIR [68]	Update required for server and every user	Update (MB/user)	7.4	14.7	29.5	42.4	86.8	178.1
		Query Duration (ms)	4.04	8.51	19.07	30.29	80.87	256.38
		Query Comm. (KB)	7	14	28	41	84	173
SealPIR [31]	Server update only	Update (μ s/slot)	2.21	2.19	2.19	4.22	16.36	78.1
		Query Duration (ms)	117	301	902	1,636	5,831	25,338
		Query Comm. (KB)	278	278	278	278	278	278
Spiral [91]	Server update only	Update (μ s/slot)	37.62	62.28	31.36	31.34	63.63	298.31
		Query Duration (ms)	249	501	794	797	1,423	3,882
		Query Comm. (KB)	30	30	36	36	36	36

combination of Regev [104] and GSW [63] schemes which provides efficient ciphertext-ciphertext multiplication thus achieving better performance on query processing.

B.2 PIR Scheme Selection

We further analyze our benchmark on recent single-server PIR schemes shown in Table 2. For fairness, we do not enable our optimizations to Spiral (see § 6.1). SimplePIR [68], the only stateful PIR in the table, is significantly more efficient on query processing, but it causes high traffic when the server updates the cache. For instance, each user needs to fetch a 29.5MB message from the server when an updated cache (with 2²⁰ 64-byte slots) is queried, which is unrealistic for PDNS. Further, its communication overhead grows as the cache size grows, and it is outperformed by Spiral when the slot size is ≥ 128 bytes.

SealPIR [31] and Spiral [91] are stateless PIR schemes. When updating the cache, the server only needs to encode the new slots and does not need to send any updates to the users. SealPIR is more efficient in encoding than Spiral, especially for small entries. Regarding the speed for query processing, SealPIR is better at dealing with small caches with small slots but is less efficient in other cases. After further investigation, we find that Spiral’s implementation pads all small slots to 256 bytes, hence its actual performance for slot size smaller than 256 bytes is misleading. Finally, Spiral reduces the traffic needed to operate by 7.7 \times compared to SealPIR. Note that a number of single-server PIR schemes are newly proposed as we were implementing PDNS from Spiral [39, 52, 68, 84, 92, 98, 126]. However, they are either stateful, or incur large communication overhead, or do not perform better than Spiral over small records. Hence, we do not switch from our underlying PIR to these schemes.

C CACHE MISS HANDLING ALTERNATIVES

We here discuss some alternatives to our mechanism to handle cache misses (see § 4.2), which we have discarded because they do not meet our privacy model (see § 3.1).

A strawman solution is to retreat to regular DNS (no PIR) when a cache miss occurs, *i.e.*, letting the user send a second query in plaintext to the ReR. The benefit of this solution is that it keeps compatibility with the existing DNS system to the largest extent. Nevertheless, it exposes some queries to the ReR which violates a user’s privacy.

A more intriguing solution is to fallback to ODNs, *i.e.*, introduce a proxy to relay user’s requests to a ReR (see § 2.1). Adding such proxy in PDNS, *e.g.*, provided by another corporation, would re-introduce

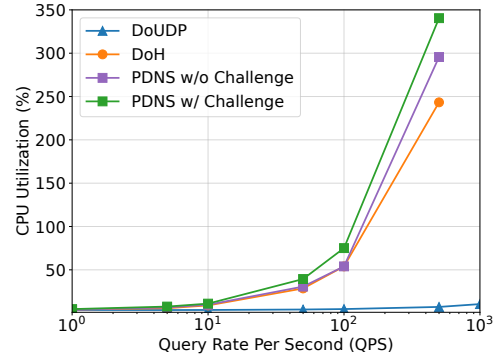


Figure 5: ANS CPU usage as a function of the query rate.

the need for a non-collusion agreement, which downgrades the privacy guarantees. Alternatively, the proxy can be distributed, *e.g.*, integrating with Tor [56] or allowing DNS users to act as each other ODNs proxies. The advantage of a distributed approach is to scatter private DNS traffic across many parties, making it harder to re-centralize the information if needed, *e.g.*, via subpoenas. Nevertheless, this introduces all security vulnerabilities of distributed systems: for example, privacy leaks are possible if a ReR controls some of the peers [120].

D ADDITIONAL PDNS BENCHMARK

Scalability of Authoritative Name Server – Figure 5 is a visualization of the “Scalability” discussion in § 6.2.

System Initialization – PDNS ReR and client execute SetupServer and SetupUser, respectively, at each reboot. Further, the client re-runs SetupUser when challenged by an ANS (see § 5) to regenerate its backup key pairs. Figure 6(a) shows the duration of each initialization phase (at client and server) as a function of the cache size. The figure shows that, with a cache size of 0.5MB, the server initialization takes 10 seconds, while it takes over 50 seconds with a cache size of 512MB. While long, this duration is acceptable since it is only required during a reboot of the ReR. Conversely, the client initialization is not a significant burden for the user as it only takes up to 150ms, irrespective of the cache size.

SetupUser also requires some traffic between PDNS client and ReR to share a public key pk. Figure 6(b) shows that this traffic increases as the cache size increases, *e.g.*, from 10.7MB with a small cache (0.5MB) up to 16MB when the cache size is larger than 128MB. An exception is observed when the cache size is 4MB where

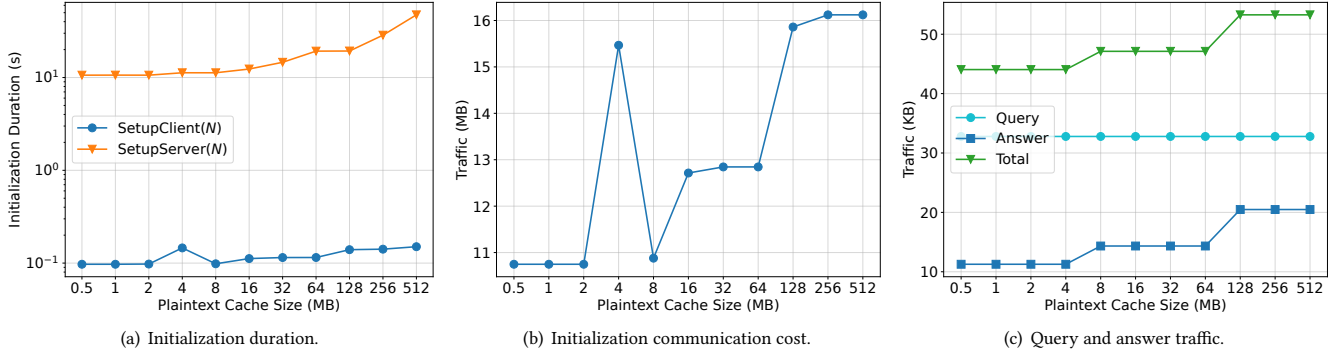


Figure 6: Additional benchmarking results. (a) Initialization duration, (b) communication cost during initialization, and (c) query and answer traffic as functions of the plaintext cache size.

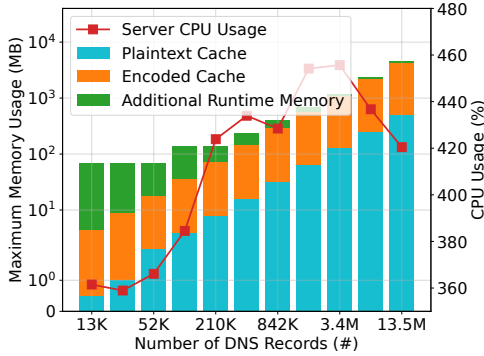


Figure 7: Memory and CPU as a function of cache size.

the traffic jumps to 15.5MB. This result is due to the selection of underlying cryptographic parameters by Spiral.

Query and Answer Traffic – Figure 3(c) shows the query and answer traffic as a function of the number of slots in a 512MB cache. We now further analyze such traffic as a function of the cache size. Figure 6(c) confirms that query traffic is bound to 32KB since, as discussed in § 6.2, the query is the encryption of an index and hence independent from the cache size. The answer traffic only increases when the cache size grows from 4 to 8MB and from 64 to 128MB, but is constant otherwise. This, again, attributes to the selection of underlying cryptographic parameters by Spiral.

Resource Usage – Next, we benchmark CPU and RAM usage for PDNS. Figure 7 shows the RAM required by the plaintext cache, the encoded cache, and the runtime ReR, as a function of the (plaintext) cache size. The figure shows that the encoded cache requires 8x the memory used by the plaintext cache, and that runtime memory usage is comprised between 60 and 100MB. As a result, the memory usage of PDNS at a ReR ranges between 68MB and 4.3GB, assuming caches which can hold about 13K (512KB) and 13M (512MB) DNS records using IPv4 (*i.e.*, 38B as in Figure 2). With respect to CPU usage⁶, Figure 7 shows that it ranges between 360% and 460%. This is a result of our multi-threading implementation of the *Answer* primitive, and the usage of 4 concurrent threads (see § 6.1).

⁶All numbers for CPU usage are concerning one core of single CPU.


E ADDITIONAL PDNS EVALUATION

E.1 Evaluation Methodology

We evaluate existing DNS solutions (DoUDP, DoH, ODOH, and DoHoT) using experiments in the wild. We select Google DNS [24] and Cloudflare DNS [21] as target ReRs for both DoUDP and DoH. To emulate a realistic access network of a DNS client, we resort to Mysterium [12, 122], a popular distributed VPN (dVPN) which provided us with 1,415 Internet residential dVPN nodes from 62 countries. To derive the duration of a DNS query between a Mysterium node and ReRs, we subtract the latency between our machine and the node for each RTT needed, *e.g.*, 1 RTT for DoUDP and 3 RTT for DoH given TLSv1.3 [106] and no connection reuse. We preferred Mysterium over academic platforms like the popular RIPE Atlas [117] since it offers higher flexibility, *e.g.*, allowing to send DoH and ODOH queries. Appendix E.2 offers more insights into the data collected in these experiments.

We use instead a single location (our lab) for DoHoT since we cannot force a Tor circuit between Mysterium nodes and a ReR. However, we restart Tor after each experiment which gives us 522 unique exit nodes over 24 hrs. For ODOH, we still rely on Mysterium but also iterate the three oblivious proxies provided by DNSCrypt Proxy [7], a popular and cross-platform local proxy which supports many DNS protocols. Finally, we perform iterative DNS lookups on our machine for 122K domains collected in Mysterium (see § 7.2), and estimate the duration of direct queries towards authoritative DNS servers, as used by ReR-Less DNS. This procedure was confined to our own machine due to the impracticality of executing all 122,000 iterative DNS lookups across each of the 1,415 dVPN nodes. It is crucial to mention that our machine, located in the United States, benefits from relatively high bandwidth and short latencies to ANSes. Additionally, our focus was exclusively on top-ranked sites. Consequently, our evaluation of the ReR-Less DNS performance should be viewed as a conservative estimation. Users with lower bandwidth and/or in developing countries might experience less favorable performance.

When experimenting with DNS in the wild, there is no control on whether queried domain names are cached or not at a ReR. To study the effect of cache *hit* or *miss* at a ReR, we query for our own domain names – registered at AWS Route 53 [2] – with TTLs of one second and one hour, respectively. The one-hour interval

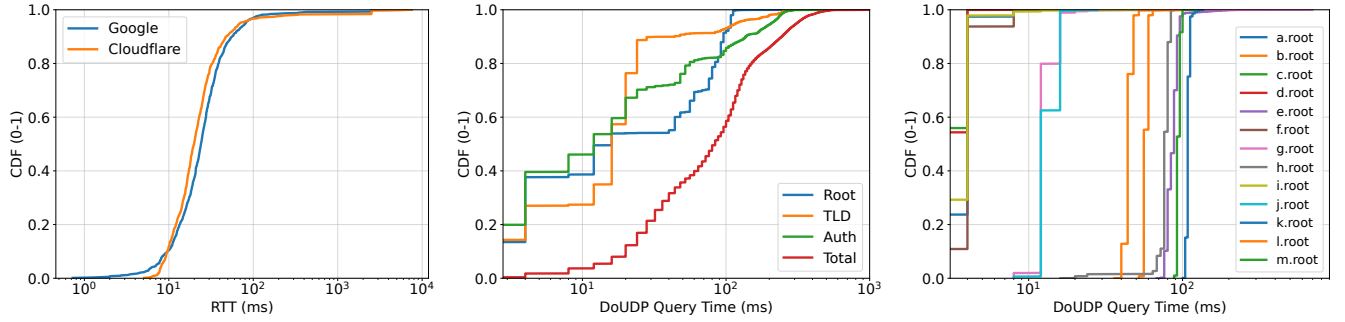

(a) CDF of RTT between 1,415 residential dVPN nodes and Google and Cloudflare DNS ReRs. (b) CDF of the duration of iterative DNS queries distinguishing between root, TLD, and final ANSes. (c) CDF of the duration of DoUDP queries per root ANS.

Figure 8: Analysis of active DNS measurements.

guarantees cache hits as long as our queries happen within such an interval. The one-second interval guarantees a cache miss as long as we perform queries slower than once a second. While many public ReRs would ignore such low TTL value, we have verified that Google and Cloudflare DNS both support it.

To evaluate PDNS, we instead set up a test-bed composed of PDNS client, ReR, and a participating final ANS. Each machine is equipped with the same hardware used in the benchmarking (see § 6.2). We then apply network delays between the machines using the Linux Traffic Control (tc) module [11] driven by the real latencies collected in the above experiments. We test a large (512MB) and small (64MB) cache using the best performing *shape* as from our benchmarking experiments, e.g., 2^{15} slots with size $S = 16KB$ for the 512MB cache.

E.2 DNS Measurement Result

We here present high-level results from our DNS measurement study (see Appendix E.1). We first analyze the network delay towards popular ReRs. To do so, we connect to 1,415 residential dVPN (Mysterium) nodes and send ping (ICMP packets) to both Google and Cloudflare public DNS ReRs, measuring the round trip time (RTT) of the path <client, dVPN node, ReR>. Then, we derive the latency of the path <dVPN node, ReR> by subtracting the latency from the path <client, dVPN node> which we also obtain via ping. Figure 8(a) shows the CDF of the RTTs between 1,415 residential dVPN nodes and Google and Cloudflare DNS ReRs. Overall, faster RTTs are measured for Cloudflare, e.g., a median RTT of 19.9ms compared to Google’s median RTT of 24.0ms.

Next, we analyze the iterative DNS lookups (DoUDP) we performed for 122K domains (40K SLDs) collected with a passive Mysterium node. Figure 8(b) shows the CDF of DoUDP query duration per domain distinguishing between each step of the iterative lookup: root, TLD, and final ANSes. The figure shows similar results across ANSes, with a median duration of 16ms for both root and TLD ANSes, and 12ms for final ANSes. Further analysis shows that the highly variable query duration observed for both root and TLD ANSes is primarily due to dig [4, 6] which iterates through different root and TLD ANSes. In fact, the closest root ANSes to our test-bed (c.root and d.root) consistently respond in less than 1ms, versus over 100ms for the furthest one (k.root) as shown in Figure 8(c). Similar results apply to TLD.

E.3 Security Effectiveness

We evaluate PDNS resilience to reflection attacks (see § 3.1). We use our DNS traces, including 42K ANSes involved and 122K unique domains, to drive the distribution of the number of domains per ANS. Note that few ANSes control over 600 sub-domains, while over 90% of the ANSes manage less than 4 sub-domains. We select the top N% domains to be cached by PDNS ReR and simulate attackers launching reflection attacks by pretending to experience cache misses for each domain. We assume an attacker has the list of domains supported by PDNS and a maximum upload bandwidth of 1Gbps.

Figure 4(b) shows that, without the security feature introduced in § 5, a single attacker can generate over 100MB of traffic per second, and the traffic grows linearly as the number of attackers grows. The limit on the “reflection traffic”, i.e., from ANS to ReR, is dependent on the total bandwidth of all attackers and of all ANSes. When considering our security mechanism, Figure 4(b) shows that the reflection traffic reduces to less than 12MB per TTL, i.e., for how long a record stays in the ReR’s cache, with little impact of the number of attackers and the amount of domains found in the cache. This is because our security mechanism ensures that each domain can only be populated once in the PDNS ReR within its TTL, thus putting a deterministic cap on the reflection traffic. Having more attackers or fewer domains cached only allows to consume that cap faster within a TTL.

F DEPLOYMENT COST ANALYSIS

We here estimate the deployment costs of PDNS and discuss whether it is viable to be provided as a subscription-based service as of today. Our analysis is based upon a comprehensive study [114] that models the DNS client behavior with a dataset collected from a university campus network.

We assume that PDNS is deployed using a public cloud service. Upon consulting the pricing calculators provided by AWS [1] and Google Cloud [8], we determine that the costs associated with configuring an 8-core CPU machine – similar to the one used in the benchmarking (§ 6.2) and evaluation (§ 7) sections – are comparable across two cloud providers. Specifically, the estimated computing costs amount to approximately \$148.92 on AWS and \$148.37 on Google Cloud, per month. For simplicity, we will consider the rounded value of \$149 for the subsequent calculations. It is worth

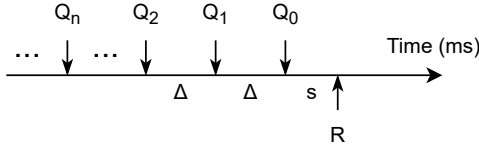


Figure 9: Illustration of the modeling for delayed response forwarding.

noting that both costs scale linearly with the number of CPU cores. As shown in Figure 3(d), PDNS running on a machine equipped with an 8-core CPU can handle 8 QPS (assuming a small cache) or 4 QPS (assuming a large cache). In addition, the cloud also charges for data transfer from cloud machines to the Internet (the reverse is free). AWS and Google Cloud charge for at most \$0.09 per GB and \$0.085 per GB, respectively. We take the upper bound of \$0.09 per GB for the subsequent calculations.

According to the findings in [114], users perform on average between 2,600 and 3,724 DNS queries every day. It follows that a PDNS using the configuration above can serve at least between 93 (large cache) and 186 users (small cache) in a day, *i.e.*, $3600 \times 24 \times 8/3,724 = 186$. As a result, the computing cost per user amounts to approximately \$0.8 with a small cache or \$1.6 with a large cache. In addition, the data transfer will cost $3,724 \times 30 \times 40\text{KB} \times \$0.09/\text{GB} = \$0.4$ per user. This means that if a user is willing to pay more than \$2 per month to safeguard their privacy, PDNS could be a viable business proposition.

The above analysis ignores potentially concurrent users as well as the bursty nature of DNS requests. In the study by [114], the bursty behavior of DNS queries is measured using “clusters”, where each cluster consists of a minimum number of 3 queries and is separated from other clusters by an idle period of 2.5 seconds. In their research, they report the CDFs of the number of queries per cluster and cluster duration. Although direct ratios between the number of queries and duration within each cluster were not reported, we sample these values at various percentiles and approximate the bursty demand by calculating the ratios ourselves. Based on our analysis, we find that the bursty queries generated by up to 1,033 users reach a maximum of 126 QPS. Another study has reported similar peak QPS with many more users [60]. To support such capacity, machine(s) with 128 CPU cores are required with a small cache, or 256 CPU cores are needed with a large cache. Consequently, the monthly computing costs to serve one user would amount to approximately $128/8 \times 149/1,033 = \2.3 with a small cache, or \$4.6 with a large cache. Besides the data transfer cost of \$0.4 per user, we conclude that offering PDNS as a service would be financially viable if the monthly subscription fee is set at \$5 or higher.

G TIMING ATTACK ANALYSIS

Method – Assume an infinite series of queries with descending subscripts $\dots, Q_n, Q_{n-1}, \dots, Q_1, Q_0$ arrive at the PDNS ReR, as shown in Figure 9. Each pair of adjacent queries is made by different users. We assume that these queries finish with an equal interval Δ , and each query has a probability of m to trigger the cache miss. Let Y_i be the random variable to denote whether a query Q_i has triggered a cache miss. Then we have $\forall i \geq 0, \text{Prob}(Y_i = 1) = m, \text{Prob}(Y_i = 0) = 1 - m$. We further assume when a cache miss occurs, the

response can be forwarded to PDNS ReR instantaneously. However, to defend against timing attacks from PDNS ReR, *i.e.*, correlating the forwarded response from ANSes and the queries where user identity is known to PDNS ReR, the ANS should delay the response forwarding by a random duration. Let X_i be the random variable of the delay of the response for query Q_i , sampled from distribution \mathcal{D} . For the sake of simplicity, we assume all ANSes have the same delay distribution.

Consider a response R arriving at time s after Q_0 . The probability that this response is for Q_i is $\text{Prob}(Y_i = 1 \cap X_i = s + i \cdot \Delta)$. Given that X_i and Y_i are two independent random variables, we have

$$\begin{aligned} & \text{Prob}(Y_i = 1 \cap X_i = s + i \cdot \Delta) \\ &= \text{Prob}(Y_i = 1) \cdot \text{Prob}(X_i = s + i \cdot \Delta) \\ &= m \cdot \text{Prob}(X = s + i \cdot \Delta). \end{aligned} \quad (1)$$

When $\text{Prob}(X > \Delta) > 0$, meaning that the delay may be longer than Δ , there are multiple possible queries for which R might correlate to. It thus poses difficulty for the PDNS ReR to perform the timing attack. To quantify the difficulty, we use Shannon entropy as the metric. Specifically, the entropy of a response arriving s ms after Q_0 is the sum of the entropy of every past query correlating to the response, *i.e.*,

$$\begin{aligned} \text{Entropy}(s) &= \lim_{n \rightarrow \infty} \sum_{i=0}^n -\frac{\text{Prob}(Y_i = 1 \cap X_i = s + i \cdot \Delta)}{\sum_{j=0}^n \text{Prob}(Y_j = 1 \cap X_j = s + i \cdot \Delta)} \\ &\quad \cdot \log \frac{\text{Prob}(Y_i = 1 \cap X_i = s + i \cdot \Delta)}{\sum_{j=0}^n \text{Prob}(Y_j = 1 \cap X_j = s + i \cdot \Delta)} \\ &= \lim_{n \rightarrow \infty} \sum_{i=0}^n -\frac{\text{Prob}(X_i = s + i \cdot \Delta)}{\sum_{j=0}^n \text{Prob}(X_j = s + i \cdot \Delta)} \\ &\quad \cdot \log \frac{\text{Prob}(X_i = s + i \cdot \Delta)}{\sum_{j=0}^n \text{Prob}(X_j = s + i \cdot \Delta)} \end{aligned} \quad (2)$$

Equation 2 reveals a noteworthy point: the efficacy of the timing attack defense is not contingent upon the cache miss rate. This might seem counterintuitive. Nevertheless, the independence from the cache miss rate is rooted in the inherent inability of PDNS ReR – as guaranteed by the PIR – to determine whether a query will indeed result in a cache miss.

Results – According to the findings in [114], 1,000 users will perform queries at an average rate of 32 QPS, which translates to $\Delta = 31\text{ms}$. The cache miss chance for each query is 0.33, *i.e.*, $m = 0.33$. Below, we calculate the entropy for a response arriving at s ms after Q_0 , where s is an integer and $0 \leq s < \Delta$.

To render the outcomes more comprehensible, we introduce a threshold denoted as T_e , which signifies the point at which the timing attack defense is considered effective. This effectiveness manifests when PDNS ReR fails to differentiate between a response originating from two separate queries, both of which have an equal likelihood. In precise terms, we set $T_e = -\frac{1}{2} \log \frac{1}{2} - \frac{1}{2} \log \frac{1}{2} \approx 0.69$, delineating a criterion for the defense mechanism’s adequacy.

We consider two distributions in our evaluation: the uniform distribution \mathcal{U} and geometric distribution \mathcal{G} . When $X \sim \mathcal{U}(0, d)$, we have

$$\text{Prob}(X_i = k) = \begin{cases} \frac{1}{d}, & k \leq d \\ 0, & \text{otherwise} \end{cases}, \quad (3)$$

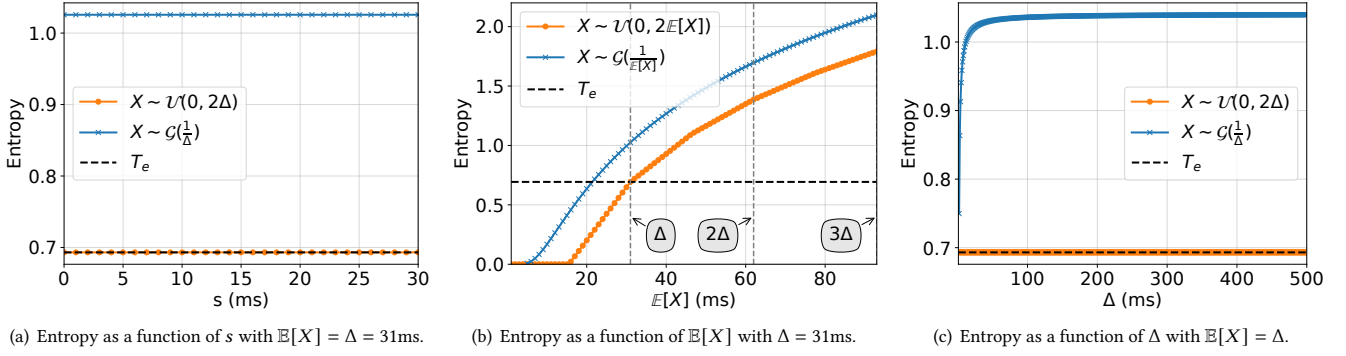


Figure 10: The effectiveness of delayed response forwarding to PDNS ReR.

where the average delay time is $\mathbb{E}[X] = \frac{\Delta}{2}$. When $X \sim \mathcal{G}(p)$, we have

$$\text{Prob}(X_i = k) = (1 - p)^{k-1} \cdot p, \quad (4)$$

where the average delay time is $\mathbb{E}[X] = \frac{1}{p}$. We leave other potential distributions as future work.

First, we explore the entropy across different s ranging within the interval $[0, \Delta)$. In this experiment, we fix the $\Delta = 31\text{ms}$. For both the uniform and geometric distributions where the delay is sampled from, we adjust the parameters so that $\mathbb{E}[X] = \Delta$. Figure 10(a) shows that the entropy of geometric distribution is much higher than our threshold T_e , whereas that of uniform distribution is equal to T_e . It further shows that the entropy for both distributions is barely changed given different s . This means that the PDNS ReR will have roughly the same difficulty in correlating the response to the queries whenever the response arrives, illustrating the stable effectiveness of the delayed response.

Next, we investigate the relationship between the average delayed duration $\mathbb{E}[X]$ and the entropy. We fix the $\Delta = 31\text{ms}$, and calculate the average entropy across all $s \in [0, \Delta)$ for each $\mathbb{E}[X]$ value. Figure 10(b) illustrates that the entropy for both distributions increases as the $\mathbb{E}[X]$ increases, where the geometric distribution is overall better than the uniform distribution. When $\mathbb{E}[X] \geq \Delta$, the entropy for both distributions is greater than or equal to T_e , demonstrating the effectiveness of the defense.

Finally, we investigate how Δ affects the defense effectiveness of delayed response forwarding. We adjust $\mathbb{E}[X] = \Delta$ and calculate the average entropy across all $s \in [0, \Delta)$ for each Δ value. Figure 10(c) shows that the entropy is relatively stable regardless of the value of Δ . This means that the efficacy of the defense mechanism is not notably impacted by the variation in Δ . Instead, the crux lies in the proper selection of the average delayed duration. Remarkably, the frequency at which queries are made does not exert a substantial influence on the defense's effectiveness, provided that the average delay duration is thoughtfully determined. Consequently, the query frequency primarily functions as a determinant for determining the average delay duration itself.

While our model simplifies the intricacies inherent in real-world PDNS scenarios, it undeniably underscores the potency of incorporating delayed response forwarding to PDNS ReR as a robust mechanism to counter timing attacks. In actual deployments, ANSes would opt for diverse delay-sampling distributions. Moreover, the response delay would naturally incorporate random network-related delays.

This layered complexity would invariably heighten the challenge for PDNS ReR attempting timing attacks, thereby reinforcing the efficacy of the defense strategy. We leave further explorations as future work.